


16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1


M L K J H F E D C B A

NOTE

TYPICAL IDENTIFICATION SYSTEM

TYPICAL IDENTIFICATION SYSTEM PROCESS RELATED IDENTIFICATION: PLANT CODE NUMERIC SEQUENCE NUMBERING LOGIC SUBDIVISION FOR PIPELINE, IN EACH SYSTEM VALVES AND MEASURING CIRCUITS (1.4) 1.1 PLANT CODE <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>PLANT SECTION</td><td>ENTRY</td></tr> <tr><td>PLANT COMMON</td><td>02</td></tr> <tr><td>STG & AUXILIARY SYSTEM</td><td>20</td></tr> <tr><td>GT/HSG UNIT</td><td>21</td></tr> <tr><td>RESERVE BOILER #1</td><td>22</td></tr> <tr><td>RESERVE BOILER #2</td><td>23</td></tr> <tr><td>RESERVE BOILER #3</td><td>24</td></tr> </table> 1.2 LEVEL '1': SYSTEM CODE SYSTEM IDENTIFICATION LETTERS FUNCTION KEY IN SYSTEM CLASSIFICATION IS AS FOLLOWS <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr><th>CODE</th><th>IDENTIFICATION</th></tr> </thead> <tbody> <tr><td>A</td><td>GRID AND DISTRIBUTION SYSTEMS</td></tr> <tr><td>B</td><td>POWER TRANSMISSION AND AUXILIARY POWER SUPPLY</td></tr> <tr><td>C</td><td>INSTRUMENTATION AND CONTROL EQUIPMENT (IDENTIFICATION ON A PRIORITY BASIS ACCORDING TO MAIN, INSTRUMENTATION AND CONTROL FUNCTION ALSO ACCEPTABLE IN COMPOSITE STRUCTURE HARDWARE PACKAGING SYSTEMS.)</td></tr> <tr><td>D</td><td>INSTRUMENTATION AND CONTROL EQUIPMENT (FOR USE ONLY WHEN THE FUNCTION KEYS CM TO CT ARE INSUFFICIENT FOR THE IDENTIFICATION)</td></tr> <tr><td>E</td><td>CONVENTIONAL FUEL SUPPLY AND RESIDUES DISPOSAL</td></tr> <tr><td>G</td><td>WATER SUPPLY AND DISPOSAL</td></tr> <tr><td>H</td><td>CONVENTIONAL HEAT GENERATION</td></tr> <tr><td>L</td><td>STEAM, WATER, GAS CYCLES</td></tr> <tr><td>M</td><td>MAIN MACHINE SETS</td></tr> <tr><td>N</td><td>PROCESS ENERGY SUPPLIED FOR EXTERNAL USERS (e.g. DISTRICT HEATING)</td></tr> <tr><td>P</td><td>COOLING WATER SYSTEMS</td></tr> <tr><td>Q</td><td>AUXILIARY SYSTEMS</td></tr> <tr><td>S</td><td>ANCILLARY SYSTEMS</td></tr> <tr><td>U</td><td>STRUCTURES</td></tr> <tr><td>W</td><td>RENEWABLE ENERGY PLANTS</td></tr> <tr><td>X</td><td>HEAVY MACHINERY (NOT MAIN MACHINES SETS)</td></tr> <tr><td>Z</td><td>WORKSHOP AND OFFICE EQUIPMENT</td></tr> </tbody> </table> <p>NOTE : FOR THE DETAIL FUNCTION KEY, REFER TO KKS NUMBERING SYSTEM (REFER TO PLANT IDENTIFICATION SYSTEM DESCRIPTION DOC.NO.198L-00GEN00-G02-0002)</p> LEVEL '2' EQUIPMENT UNIT CODE (A₁ A₂ A₃ A₄) EQUIPMENT UNIT CLASSIFICATION (A₁ A₂) <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>A</td><td>MECHANICAL EQUIPMENT</td></tr> <tr><td>AA</td><td>VALVES, DAMPER, ETC. (INCL. ACTUATORS, ALSO MANUAL, RUPURE DISK, EQUIPMENT)</td></tr> <tr><td>AB</td><td>ISOLATING ELEMENTS, AIR LOCKS</td></tr> <tr><td>AC</td><td>HEAT EXCHANGERS</td></tr> <tr><td>AE</td><td>TURNING, DRIVING, LIFTING AND SLEWING GEAR (INCL. MANIPULATORS)</td></tr> <tr><td>AF</td><td>CONTINUOUS CONVEYOR, FEEDERS (ESCALATORS)</td></tr> <tr><td>AG</td><td>GENERATOR UNITS</td></tr> <tr><td>AH</td><td>HEATING, COOLING UNITS</td></tr> <tr><td>AJ</td><td>SIZE REDUCTION EQUIPMENT</td></tr> <tr><td>AK</td><td>COMPACTING, PACKAGING EQUIPMENT</td></tr> <tr><td>AM</td><td>MIXERS, AGITATORS</td></tr> <tr><td>AN</td><td>COMPRESSOR UNITS, FANS, BLOWERS</td></tr> <tr><td>AP</td><td>PUMP UNITS</td></tr> <tr><td>AS</td><td>ADJUSTING AND TENSIONING EQUIPMENT</td></tr> <tr><td>AT</td><td>CLEANING, DRYING, FILTERING, SEPARATING EQUIPMENT</td></tr> <tr><td>AU</td><td>CONVERTORS (NON ELECTRICAL), E.G. SERVOMOTOR</td></tr> <tr><td>AV</td><td>COMBUSTION EQUIPMENT, E.G. GRATES</td></tr> <tr><td>AW</td><td>STATIONARY TOOLING, TREATMENT EQUIPMENT</td></tr> <tr><td>AX</td><td>TEST AND MONITORING EQUIPMENT</td></tr> <tr><td>AZ</td><td>SPECIAL EQUIPMENT UNITS</td></tr> </table> EQUIPMENT UNIT CLASSIFICATION (A₁ A₂ A₃ A₄) <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>B</td><td>MECHANICAL EQUIPMENT</td></tr> <tr><td>BB</td><td>VESSELS, STORAGE TANKS</td></tr> <tr><td>BE</td><td>SHAFTS (FOR ERECTION AND MAINTENANCE ONLY)</td></tr> <tr><td>BF</td><td>FOUNDATIONS</td></tr> <tr><td>BG</td><td>BOILER HEATING SURFACES</td></tr> <tr><td>BN</td><td>JET PUMPS, EJECTORS, INJECTORS</td></tr> <tr><td>BP</td><td>FLOW RESTRICTORS AND LIMITERS (INCL. RUPTURE DISCS), ORIFICES (NOT METERING ORIFICES)</td></tr> <tr><td>BQ</td><td>HANGERS, SUPPORTS, FRAMES, RACKS, PIPE PENETRATIONS</td></tr> <tr><td>BR</td><td>PIPING, DUCTWORK, CHUTES</td></tr> <tr><td>BS</td><td>SILENCERS</td></tr> <tr><td>BT</td><td>CATALYTIC CONVERTER MODULES</td></tr> <tr><td>BU</td><td>INSULATION, SHEETING</td></tr> <tr><td>BY</td><td>MECHANICALLY OPERATED CONTROLLERS (CONTROL UNITS)</td></tr> <tr><td>BZ</td><td>SPECIAL EQUIPMENT UNITS</td></tr> <tr><td>C</td><td>DIRECT MEASURING CIRCUITS</td></tr> <tr><td>CD</td><td>DENSITY</td></tr> <tr><td>CE</td><td>ELECTRICAL VARIABLES</td></tr> <tr><td>CF</td><td>FLOW RATE</td></tr> <tr><td>CG</td><td>DISTANCE, LENGTH, POSITION</td></tr> <tr><td>CK</td><td>TIME</td></tr> <tr><td>CL</td><td>LEVEL</td></tr> <tr><td>CM</td><td>MOISTURE, HUMIDITY</td></tr> <tr><td>CP</td><td>PRESSURE</td></tr> <tr><td>CQ</td><td>QUALITY VARIABLES (ANALYSIS, MATERIAL PROPERTIES)</td></tr> <tr><td>CR</td><td>RADIATION VARIABLES</td></tr> <tr><td>CS</td><td>VELOCITY, SPEED, FREQUENCY</td></tr> <tr><td>CT</td><td>TEMPERATURE</td></tr> <tr><td>CU</td><td>COMBINED VARIABLES</td></tr> <tr><td>CV</td><td>VISCOOSITY</td></tr> <tr><td>CW</td><td>WEIGHT, MASS</td></tr> <tr><td>CX</td><td>NEUTRON FLUX (REACTOR POWER)</td></tr> <tr><td>CY</td><td>VIBRATION, EXPANSION</td></tr> <tr><td>D</td><td>CLOSED LOOP CONTROL CIRCUITS</td></tr> <tr><td>DD</td><td>DENSITY</td></tr> <tr><td>DE</td><td>ELECTRICAL VARIABLES</td></tr> <tr><td>DF</td><td>FLOW RATE</td></tr> <tr><td>DG</td><td>DISTANCE, LENGTH, POSITION</td></tr> <tr><td>DK</td><td>TIME</td></tr> <tr><td>DL</td><td>LEVEL</td></tr> <tr><td>DM</td><td>MOISTURE, HUMIDITY</td></tr> <tr><td>DP</td><td>PRESSURE</td></tr> <tr><td>DQ</td><td>QUALITY VARIABLES (ANALYSIS, MATERIAL PROPERTIES)</td></tr> <tr><td>DR</td><td>RADIATION VARIABLES</td></tr> <tr><td>DS</td><td>VELOCITY, SPEED, FREQUENCY</td></tr> <tr><td>DT</td><td>TEMPERATURE</td></tr> <tr><td>DU</td><td>COMBINED VARIABLES</td></tr> <tr><td>DV</td><td>VISCOOSITY</td></tr> <tr><td>DW</td><td>WEIGHT, MASS</td></tr> <tr><td>DX</td><td>NEUTRON FLUX (REACTOR POWER)</td></tr> <tr><td>DY</td><td>VIBRATION, EXPANSION</td></tr> <tr><td>E</td><td>ANALOG AND BINARY SIGNAL CONDITIONING</td></tr> <tr><td>EA</td><td>OPEN-LOOP CONTROL</td></tr> <tr><td>EB</td><td>SUBDIVISION</td></tr> <tr><td>EC</td><td>POSSIBLE</td></tr> <tr><td>ED</td><td>AS REQUIRED</td></tr> <tr><td>EE</td><td></td></tr> <tr><td>EG</td><td>ALARM, ANNUNCIATION</td></tr> <tr><td>EH</td><td>SUBDIVISION</td></tr> <tr><td>EJ</td><td>POSSIBLE</td></tr> <tr><td>EK</td><td>AS REQUIRED</td></tr> <tr><td>EM</td><td>PROCESS COMPUTER</td></tr> <tr><td>EN</td><td>SUBDIVISION</td></tr> <tr><td>EP</td><td>POSSIBLE</td></tr> <tr><td>EQ</td><td>AS REQUIRED</td></tr> <tr><td>ER</td><td>REACTOR PROTECTION</td></tr> <tr><td>EU</td><td>COMBINED ANALOG AND BINARY SIGNAL CONDITIONING</td></tr> <tr><td>EW</td><td>PROTECTION</td></tr> <tr><td>EX</td><td>SUBDIVISION</td></tr> <tr><td>EY</td><td>POSSIBLE</td></tr> <tr><td>EZ</td><td>AS REQUIRED</td></tr> <tr><td>F</td><td>INDIRECT MEASURING CIRCUITS</td></tr> <tr><td>FD</td><td>DENSITY</td></tr> <tr><td>FE</td><td>ELECTRICAL VARIABLES</td></tr> <tr><td>FF</td><td>FLOW, RATE</td></tr> <tr><td>FG</td><td>DISTANCE, LENGTH, POSITION</td></tr> <tr><td>FK</td><td>TIME</td></tr> <tr><td>FL</td><td>LEVEL</td></tr> <tr><td>FM</td><td>MOISTURE, HUMIDITY</td></tr> <tr><td>FP</td><td>PRESSURE</td></tr> <tr><td>FQ</td><td>QUALITY VARIABLES (ANALYSIS, MATERIAL, PROPERTIES)</td></tr> <tr><td>FR</td><td>RADIATION VARIABLES</td></tr> <tr><td>FS</td><td>VELOCITY, SPEED, FREQUENCY</td></tr> <tr><td>FT</td><td>TEMPERATURE</td></tr> <tr><td>FU</td><td>COMBINED VARIABLES</td></tr> <tr><td>FV</td><td>VISCOOSITY</td></tr> <tr><td>FW</td><td>WEIGHT, MASS</td></tr> <tr><td>FX</td><td>NEUTRON FLUX (REACTOR POWER)</td></tr> <tr><td>FY</td><td>VIBRATION, EXPANSION</td></tr> </table> EQUIPMENT UNIT CLASSIFICATION (A₁ A₂ A₃ A₄) <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>G</td><td>ELECTRICAL EQUIPMENT</td></tr> <tr><td>GA</td><td>JUNCTION BOXES FOR ANALOG MEASURED DATA</td></tr> <tr><td>GB</td><td>JUNCTION BOXES FOR BINARY SIGNALS</td></tr> <tr><td>GC</td><td>JUNCTION BOXES FOR ANALOG SAFETY I&C (SIL) MEASURED DATA</td></tr> <tr><td>GD</td><td>JUNCTION BOXES FOR POWER CABLES > 1 KV</td></tr> <tr><td>GE</td><td>JUNCTION BOXES FOR POWER CABLES < 1 KV</td></tr> <tr><td>GF</td><td>JUNCTION BOXES FOR OPERATIONAL I&C (BELT) MEASURED DATA</td></tr> <tr><td>GG</td><td>JUNCTION BOXES FOR THERMOCOUPLES</td></tr> <tr><td>GH</td><td>ELECTRICAL AND INSTRUMENTATION AND CONTROL INSTALLATION UNITS (E.G. CUBICLES, BOXES)</td></tr> <tr><td>GK</td><td>INFORMATION DISPLAY AND OPERATOR CONTROL EQUIPMENT FOR PROCESS COMPUTERS AND AUTOMATION SYSTEMS (KEYBOARDS, MONITORS, PRINTERS)</td></tr> <tr><td>GM</td><td>JUNCTION BOXES FOR LIGHT CURRENT SYSTEMS OF NATIONAL TELECOMMUNICATIONS SERVICES</td></tr> <tr><td>GN</td><td>NETWORKING EQUIPMENT (BUS COUPLERS AND OPTIC TRANSCIVERS, ETC.)</td></tr> <tr><td>GP</td><td>SUBDISTRIBUTION/JUNCTION BOXES FOR LIGHTING</td></tr> <tr><td>GQ</td><td>SUBDISTRIBUTION/JUNCTION BOXES FOR POWER SOCKETS</td></tr> <tr><td>GR</td><td>DC GENERATING EQUIPMENT (BATTERIES)</td></tr> <tr><td>GS</td><td>SWITCHGEAR EQUIPMENT (IF NOT IDENTIFIED UNDER PROCESS EQUIPMENT)</td></tr> <tr><td>GT</td><td>TRANSFORMER EQUIPMENT</td></tr> <tr><td>GU</td><td>CONVERTER EQUIPMENT</td></tr> <tr><td>GV</td><td>STRUCTURE-RELATED EARTHING AND LIGHTNING PROTECTION EQUIPMENT, SURGE ARRESTORS</td></tr> <tr><td>GW</td><td>CABINET POWER SUPPLY EQUIPMENT</td></tr> <tr><td>GX</td><td>ACTUATING EQUIPMENT FOR ELECTRICAL VARIABLES</td></tr> <tr><td>GY</td><td>JUNCTION BOXES FOR LIGHT CURRENT SYSTEMS (NOT OF NATIONAL TELECOMMUNICATIONS SERVICES)</td></tr> <tr><td>GZ</td><td>HANGERS, SUPPORTS AND RACKS FOR ELECTRICAL AND JUNCTION BOXES FOR LIGHT CURRENT SYSTEMS INSTRUMENTATION AND CONTROL EQUIPMENT</td></tr> </table> 1.3.2 EQUIPMENT UNIT NUMBERING FOR THE A. NUMBERING OF VALVES (AA....), PIPING (BR....) AN MEASURING CIRCUITS (C....) THE FOLLOWING NUMBERING LOGIC WILL BE USED. <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr><th>NUMBER RANGE</th><th>VALVES (AA...)</th><th>PIPES (BR...)</th><th>MEASURING CIRCUITS (C...)</th></tr> </thead> <tbody> <tr><td>001-050</td><td>MOTOR OPERATED VALVES</td><td>MAIN PIPES</td><td>001-079 : ANALOG MEASUREMENT</td></tr> <tr><td>051-080</td><td>CHECK VALVES</td><td></td><td></td></tr> <tr><td>081-100</td><td>CONTROL VALVES</td><td>NOT USED</td><td></td></tr> <tr><td>101-190</td><td>VALVES IN MAIN PIPES</td><td></td><td></td></tr> <tr><td>191-199</td><td>SAFETY VALVES</td><td>UPSTREAM AND DOWNSTREAM LINES OF SAFETY AND PRESSURE RELIEF VALVES</td><td>080-099 : BINARY MEASUREMENT</td></tr> <tr><td>201-249</td><td>CHECK VALVES</td><td>NOT USED</td><td></td></tr> <tr><td>251-299</td><td>NOT USED</td><td></td><td>FOR TESTING EQUIPMENT</td></tr> <tr><td>301-399</td><td>ISOLATING EQUIPMENT FOR MEASURING</td><td>PRESSURE LINES FOR MEASUREMENT</td><td>NOT USED</td></tr> <tr><td>401-499</td><td>VALVES IN DRAINS AND FLUSHING PIPES</td><td>DRAINS, FLUSHING PIPES, PRESSURE SUPPRESSION PIPES</td><td>ACCEPTANCE TESTS</td></tr> <tr><td>501-599</td><td>VALVES FOR VENTING</td><td>VENTING</td><td>LOCAL MEASURING CIRCUITS</td></tr> <tr><td>601-699</td><td>VALVES IN SAMPLING AND PROPORTIONING</td><td>SAMPLING AND PROPORTIONING PIPES</td><td>ELEMENT (SENSORS)</td></tr> <tr><td>701-799</td><td>VALVES FOR INTERNAL CONTROLS</td><td>INTERNAL CONTROL PIPES</td><td>BLOCKED</td></tr> <tr><td>801-899</td><td>NOT USED</td><td>NOT USED</td><td>BLOCKED</td></tr> <tr><td>901-999</td><td>NOT USED</td><td>NOT USED</td><td>GROUPED MEASURING CIRCUITS (e.g. MULTIPoint SELECTOR SWITCHED, MULTI CHANNEL RECORDERS)</td></tr> </tbody> </table> PIPING IDENTIFICATION <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">EXAMPLE</td><td></td></tr> <tr><td style="text-align: center;">DIRECTION OF FLOW</td><td></td></tr> <tr><td style="text-align: center;">DIRECTION OF FLOW</td><td></td></tr> <tr><td style="text-align: center;">FLOW FOR BOTH DIRECTION</td><td></td></tr> <tr><td></td><td>PLANT CODE SYSTEM CODE LINE NUMBER PIPE DESIGNATION NOMINAL DIAMETER(DN) PIPE</td></tr> </table> <p style="text-align: right;">REFERENCE DOCUMENTS/DRAWINGS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>DOC/DWG NO.</td><td>TITLE</td></tr> <tr><td>JCP2-DA01-00ZEN-020001</td><td>DOCUMENT IDENTIFICATION</td></tr> <tr><td>JCP2-DA01-00ZEN-020002</td><td>EQUIPMENT AND SYSTEM IDENTIFICATION</td></tr> </table> <p style="text-align: center;">FOR APPROVAL</p> <p style="text-align: center;">THIS DRAWING IS THE PROPERTY OF DOOSAN ENERBILITY CO., LTD. IT IS NOT TO BE COPIED OR USED IN ANY WAY DEDIMENTAL TO THE COMPANY.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>B</td><td>30.May.2025</td><td>ISSUED FOR APPROVAL</td><td>Y.J.KIM</td><td>C.K.HONG</td></tr> <tr><td>A</td><td>25.Apr.2025</td><td>ISSUED FOR APPROVAL</td><td>Y.J.KIM</td><td>C.K.HONG</td></tr> <tr><td>REV. NO.</td><td>DATE</td><td>DESCRIPTION</td><td>DRAWN</td><td>CHKD.</td></tr> </table> <p style="text-align: center;">Project</p> <p style="text-align: center;">JAFURAH COGENERATION PROJECT - PHASE II EXPANSION</p> <p style="text-align: center;">Owner KEPCO POWER COMPANY</p> <p style="text-align: center;">Owner's Engineer WSP</p> <p style="text-align: center;">Contractor DOOSAN DOOSAN ENERBILITY</p> <p style="text-align: center;">Sub-Supplier HYUNDAI POWER SYSTEMS</p> <p style="text-align: center;">DRAWING TITLE AUX BOILER PIPING & INSTRUMENT DIAGRAM</p> <p style="text-align: center;">SYMBOL AND LEGEND (4/4)</p> <p style="text-align: center;">GRAPHIC SCALE 0 5 10 25 50 100 200m</p> <p style="text-align: center;">SCALE 1:1 DRAWING NUMBER JCP2-XG02-22ZEN-121101 SHEET NO. 4/4 REV. NO. A</p>										PLANT SECTION	ENTRY	PLANT COMMON	02	STG & AUXILIARY SYSTEM	20	GT/HSG UNIT	21	RESERVE BOILER #1	22	RESERVE BOILER #2	23	RESERVE BOILER #3	24	CODE	IDENTIFICATION	A	GRID AND DISTRIBUTION SYSTEMS	B	POWER TRANSMISSION AND AUXILIARY POWER SUPPLY	C	INSTRUMENTATION AND CONTROL EQUIPMENT (IDENTIFICATION ON A PRIORITY BASIS ACCORDING TO MAIN, INSTRUMENTATION AND CONTROL FUNCTION ALSO ACCEPTABLE IN COMPOSITE STRUCTURE HARDWARE PACKAGING SYSTEMS.)	D	INSTRUMENTATION AND CONTROL EQUIPMENT (FOR USE ONLY WHEN THE FUNCTION KEYS CM TO CT ARE INSUFFICIENT FOR THE IDENTIFICATION)	E	CONVENTIONAL FUEL SUPPLY AND RESIDUES DISPOSAL	G	WATER SUPPLY AND DISPOSAL	H	CONVENTIONAL HEAT GENERATION	L	STEAM, WATER, GAS CYCLES	M	MAIN MACHINE SETS	N	PROCESS ENERGY SUPPLIED FOR EXTERNAL USERS (e.g. DISTRICT HEATING)	P	COOLING WATER SYSTEMS	Q	AUXILIARY SYSTEMS	S	ANCILLARY SYSTEMS	U	STRUCTURES	W	RENEWABLE ENERGY PLANTS	X	HEAVY MACHINERY (NOT MAIN MACHINES SETS)	Z	WORKSHOP AND OFFICE EQUIPMENT	A	MECHANICAL EQUIPMENT	AA	VALVES, DAMPER, ETC. (INCL. ACTUATORS, ALSO MANUAL, RUPURE DISK, EQUIPMENT)	AB	ISOLATING ELEMENTS, AIR LOCKS	AC	HEAT EXCHANGERS	AE	TURNING, DRIVING, LIFTING AND SLEWING GEAR (INCL. MANIPULATORS)	AF	CONTINUOUS CONVEYOR, FEEDERS (ESCALATORS)	AG	GENERATOR UNITS	AH	HEATING, COOLING UNITS	AJ	SIZE REDUCTION EQUIPMENT	AK	COMPACTING, PACKAGING EQUIPMENT	AM	MIXERS, AGITATORS	AN	COMPRESSOR UNITS, FANS, BLOWERS	AP	PUMP UNITS	AS	ADJUSTING AND TENSIONING EQUIPMENT	AT	CLEANING, DRYING, FILTERING, SEPARATING EQUIPMENT	AU	CONVERTORS (NON ELECTRICAL), E.G. SERVOMOTOR	AV	COMBUSTION EQUIPMENT, E.G. GRATES	AW	STATIONARY TOOLING, TREATMENT EQUIPMENT	AX	TEST AND MONITORING EQUIPMENT	AZ	SPECIAL EQUIPMENT UNITS	B	MECHANICAL EQUIPMENT	BB	VESSELS, STORAGE TANKS	BE	SHAFTS (FOR ERECTION AND MAINTENANCE ONLY)	BF	FOUNDATIONS	BG	BOILER HEATING SURFACES	BN	JET PUMPS, EJECTORS, INJECTORS	BP	FLOW RESTRICTORS AND LIMITERS (INCL. RUPTURE DISCS), ORIFICES (NOT METERING ORIFICES)	BQ	HANGERS, SUPPORTS, FRAMES, RACKS, PIPE PENETRATIONS	BR	PIPING, DUCTWORK, CHUTES	BS	SILENCERS	BT	CATALYTIC CONVERTER MODULES	BU	INSULATION, SHEETING	BY	MECHANICALLY OPERATED CONTROLLERS (CONTROL UNITS)	BZ	SPECIAL EQUIPMENT UNITS	C	DIRECT MEASURING CIRCUITS	CD	DENSITY	CE	ELECTRICAL VARIABLES	CF	FLOW RATE	CG	DISTANCE, LENGTH, POSITION	CK	TIME	CL	LEVEL	CM	MOISTURE, HUMIDITY	CP	PRESSURE	CQ	QUALITY VARIABLES (ANALYSIS, MATERIAL PROPERTIES)	CR	RADIATION VARIABLES	CS	VELOCITY, SPEED, FREQUENCY	CT	TEMPERATURE	CU	COMBINED VARIABLES	CV	VISCOOSITY	CW	WEIGHT, MASS	CX	NEUTRON FLUX (REACTOR POWER)	CY	VIBRATION, EXPANSION	D	CLOSED LOOP CONTROL CIRCUITS	DD	DENSITY	DE	ELECTRICAL VARIABLES	DF	FLOW RATE	DG	DISTANCE, LENGTH, POSITION	DK	TIME	DL	LEVEL	DM	MOISTURE, HUMIDITY	DP	PRESSURE	DQ	QUALITY VARIABLES (ANALYSIS, MATERIAL PROPERTIES)	DR	RADIATION VARIABLES	DS	VELOCITY, SPEED, FREQUENCY	DT	TEMPERATURE	DU	COMBINED VARIABLES	DV	VISCOOSITY	DW	WEIGHT, MASS	DX	NEUTRON FLUX (REACTOR POWER)	DY	VIBRATION, EXPANSION	E	ANALOG AND BINARY SIGNAL CONDITIONING	EA	OPEN-LOOP CONTROL	EB	SUBDIVISION	EC	POSSIBLE	ED	AS REQUIRED	EE		EG	ALARM, ANNUNCIATION	EH	SUBDIVISION	EJ	POSSIBLE	EK	AS REQUIRED	EM	PROCESS COMPUTER	EN	SUBDIVISION	EP	POSSIBLE	EQ	AS REQUIRED	ER	REACTOR PROTECTION	EU	COMBINED ANALOG AND BINARY SIGNAL CONDITIONING	EW	PROTECTION	EX	SUBDIVISION	EY	POSSIBLE	EZ	AS REQUIRED	F	INDIRECT MEASURING CIRCUITS	FD	DENSITY	FE	ELECTRICAL VARIABLES	FF	FLOW, RATE	FG	DISTANCE, LENGTH, POSITION	FK	TIME	FL	LEVEL	FM	MOISTURE, HUMIDITY	FP	PRESSURE	FQ	QUALITY VARIABLES (ANALYSIS, MATERIAL, PROPERTIES)	FR	RADIATION VARIABLES	FS	VELOCITY, SPEED, FREQUENCY	FT	TEMPERATURE	FU	COMBINED VARIABLES	FV	VISCOOSITY	FW	WEIGHT, MASS	FX	NEUTRON FLUX (REACTOR POWER)	FY	VIBRATION, EXPANSION	G	ELECTRICAL EQUIPMENT	GA	JUNCTION BOXES FOR ANALOG MEASURED DATA	GB	JUNCTION BOXES FOR BINARY SIGNALS	GC	JUNCTION BOXES FOR ANALOG SAFETY I&C (SIL) MEASURED DATA	GD	JUNCTION BOXES FOR POWER CABLES > 1 KV	GE	JUNCTION BOXES FOR POWER CABLES < 1 KV	GF	JUNCTION BOXES FOR OPERATIONAL I&C (BELT) MEASURED DATA	GG	JUNCTION BOXES FOR THERMOCOUPLES	GH	ELECTRICAL AND INSTRUMENTATION AND CONTROL INSTALLATION UNITS (E.G. CUBICLES, BOXES)	GK	INFORMATION DISPLAY AND OPERATOR CONTROL EQUIPMENT FOR PROCESS COMPUTERS AND AUTOMATION SYSTEMS (KEYBOARDS, MONITORS, PRINTERS)	GM	JUNCTION BOXES FOR LIGHT CURRENT SYSTEMS OF NATIONAL TELECOMMUNICATIONS SERVICES	GN	NETWORKING EQUIPMENT (BUS COUPLERS AND OPTIC TRANSCIVERS, ETC.)	GP	SUBDISTRIBUTION/JUNCTION BOXES FOR LIGHTING	GQ	SUBDISTRIBUTION/JUNCTION BOXES FOR POWER SOCKETS	GR	DC GENERATING EQUIPMENT (BATTERIES)	GS	SWITCHGEAR EQUIPMENT (IF NOT IDENTIFIED UNDER PROCESS EQUIPMENT)	GT	TRANSFORMER EQUIPMENT	GU	CONVERTER EQUIPMENT	GV	STRUCTURE-RELATED EARTHING AND LIGHTNING PROTECTION EQUIPMENT, SURGE ARRESTORS	GW	CABINET POWER SUPPLY EQUIPMENT	GX	ACTUATING EQUIPMENT FOR ELECTRICAL VARIABLES	GY	JUNCTION BOXES FOR LIGHT CURRENT SYSTEMS (NOT OF NATIONAL TELECOMMUNICATIONS SERVICES)	GZ	HANGERS, SUPPORTS AND RACKS FOR ELECTRICAL AND JUNCTION BOXES FOR LIGHT CURRENT SYSTEMS INSTRUMENTATION AND CONTROL EQUIPMENT	NUMBER RANGE	VALVES (AA...)	PIPES (BR...)	MEASURING CIRCUITS (C...)	001-050	MOTOR OPERATED VALVES	MAIN PIPES	001-079 : ANALOG MEASUREMENT	051-080	CHECK VALVES			081-100	CONTROL VALVES	NOT USED		101-190	VALVES IN MAIN PIPES			191-199	SAFETY VALVES	UPSTREAM AND DOWNSTREAM LINES OF SAFETY AND PRESSURE RELIEF VALVES	080-099 : BINARY MEASUREMENT	201-249	CHECK VALVES	NOT USED		251-299	NOT USED		FOR TESTING EQUIPMENT	301-399	ISOLATING EQUIPMENT FOR MEASURING	PRESSURE LINES FOR MEASUREMENT	NOT USED	401-499	VALVES IN DRAINS AND FLUSHING PIPES	DRAINS, FLUSHING PIPES, PRESSURE SUPPRESSION PIPES	ACCEPTANCE TESTS	501-599	VALVES FOR VENTING	VENTING	LOCAL MEASURING CIRCUITS	601-699	VALVES IN SAMPLING AND PROPORTIONING	SAMPLING AND PROPORTIONING PIPES	ELEMENT (SENSORS)	701-799	VALVES FOR INTERNAL CONTROLS	INTERNAL CONTROL PIPES	BLOCKED	801-899	NOT USED	NOT USED	BLOCKED	901-999	NOT USED	NOT USED	GROUPED MEASURING CIRCUITS (e.g. MULTIPoint SELECTOR SWITCHED, MULTI CHANNEL RECORDERS)	EXAMPLE		DIRECTION OF FLOW		DIRECTION OF FLOW		FLOW FOR BOTH DIRECTION			PLANT CODE SYSTEM CODE LINE NUMBER PIPE DESIGNATION NOMINAL DIAMETER(DN) PIPE	DOC/DWG NO.	TITLE	JCP2-DA01-00ZEN-020001	DOCUMENT IDENTIFICATION	JCP2-DA01-00ZEN-020002	EQUIPMENT AND SYSTEM IDENTIFICATION	B	30.May.2025	ISSUED FOR APPROVAL	Y.J.KIM	C.K.HONG	A	25.Apr.2025	ISSUED FOR APPROVAL	Y.J.KIM	C.K.HONG	REV. NO.	DATE	DESCRIPTION	DRAWN	CHKD.
PLANT SECTION	ENTRY																																																																																																																																																																																																																																																																																																																																																																																																																											
PLANT COMMON	02																																																																																																																																																																																																																																																																																																																																																																																																																											
STG & AUXILIARY SYSTEM	20																																																																																																																																																																																																																																																																																																																																																																																																																											
GT/HSG UNIT	21																																																																																																																																																																																																																																																																																																																																																																																																																											
RESERVE BOILER #1	22																																																																																																																																																																																																																																																																																																																																																																																																																											
RESERVE BOILER #2	23																																																																																																																																																																																																																																																																																																																																																																																																																											
RESERVE BOILER #3	24																																																																																																																																																																																																																																																																																																																																																																																																																											
CODE	IDENTIFICATION																																																																																																																																																																																																																																																																																																																																																																																																																											
A	GRID AND DISTRIBUTION SYSTEMS																																																																																																																																																																																																																																																																																																																																																																																																																											
B	POWER TRANSMISSION AND AUXILIARY POWER SUPPLY																																																																																																																																																																																																																																																																																																																																																																																																																											
C	INSTRUMENTATION AND CONTROL EQUIPMENT (IDENTIFICATION ON A PRIORITY BASIS ACCORDING TO MAIN, INSTRUMENTATION AND CONTROL FUNCTION ALSO ACCEPTABLE IN COMPOSITE STRUCTURE HARDWARE PACKAGING SYSTEMS.)																																																																																																																																																																																																																																																																																																																																																																																																																											
D	INSTRUMENTATION AND CONTROL EQUIPMENT (FOR USE ONLY WHEN THE FUNCTION KEYS CM TO CT ARE INSUFFICIENT FOR THE IDENTIFICATION)																																																																																																																																																																																																																																																																																																																																																																																																																											
E	CONVENTIONAL FUEL SUPPLY AND RESIDUES DISPOSAL																																																																																																																																																																																																																																																																																																																																																																																																																											
G	WATER SUPPLY AND DISPOSAL																																																																																																																																																																																																																																																																																																																																																																																																																											
H	CONVENTIONAL HEAT GENERATION																																																																																																																																																																																																																																																																																																																																																																																																																											
L	STEAM, WATER, GAS CYCLES																																																																																																																																																																																																																																																																																																																																																																																																																											
M	MAIN MACHINE SETS																																																																																																																																																																																																																																																																																																																																																																																																																											
N	PROCESS ENERGY SUPPLIED FOR EXTERNAL USERS (e.g. DISTRICT HEATING)																																																																																																																																																																																																																																																																																																																																																																																																																											
P	COOLING WATER SYSTEMS																																																																																																																																																																																																																																																																																																																																																																																																																											
Q	AUXILIARY SYSTEMS																																																																																																																																																																																																																																																																																																																																																																																																																											
S	ANCILLARY SYSTEMS																																																																																																																																																																																																																																																																																																																																																																																																																											
U	STRUCTURES																																																																																																																																																																																																																																																																																																																																																																																																																											
W	RENEWABLE ENERGY PLANTS																																																																																																																																																																																																																																																																																																																																																																																																																											
X	HEAVY MACHINERY (NOT MAIN MACHINES SETS)																																																																																																																																																																																																																																																																																																																																																																																																																											
Z	WORKSHOP AND OFFICE EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
A	MECHANICAL EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
AA	VALVES, DAMPER, ETC. (INCL. ACTUATORS, ALSO MANUAL, RUPURE DISK, EQUIPMENT)																																																																																																																																																																																																																																																																																																																																																																																																																											
AB	ISOLATING ELEMENTS, AIR LOCKS																																																																																																																																																																																																																																																																																																																																																																																																																											
AC	HEAT EXCHANGERS																																																																																																																																																																																																																																																																																																																																																																																																																											
AE	TURNING, DRIVING, LIFTING AND SLEWING GEAR (INCL. MANIPULATORS)																																																																																																																																																																																																																																																																																																																																																																																																																											
AF	CONTINUOUS CONVEYOR, FEEDERS (ESCALATORS)																																																																																																																																																																																																																																																																																																																																																																																																																											
AG	GENERATOR UNITS																																																																																																																																																																																																																																																																																																																																																																																																																											
AH	HEATING, COOLING UNITS																																																																																																																																																																																																																																																																																																																																																																																																																											
AJ	SIZE REDUCTION EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
AK	COMPACTING, PACKAGING EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
AM	MIXERS, AGITATORS																																																																																																																																																																																																																																																																																																																																																																																																																											
AN	COMPRESSOR UNITS, FANS, BLOWERS																																																																																																																																																																																																																																																																																																																																																																																																																											
AP	PUMP UNITS																																																																																																																																																																																																																																																																																																																																																																																																																											
AS	ADJUSTING AND TENSIONING EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
AT	CLEANING, DRYING, FILTERING, SEPARATING EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
AU	CONVERTORS (NON ELECTRICAL), E.G. SERVOMOTOR																																																																																																																																																																																																																																																																																																																																																																																																																											
AV	COMBUSTION EQUIPMENT, E.G. GRATES																																																																																																																																																																																																																																																																																																																																																																																																																											
AW	STATIONARY TOOLING, TREATMENT EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
AX	TEST AND MONITORING EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
AZ	SPECIAL EQUIPMENT UNITS																																																																																																																																																																																																																																																																																																																																																																																																																											
B	MECHANICAL EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
BB	VESSELS, STORAGE TANKS																																																																																																																																																																																																																																																																																																																																																																																																																											
BE	SHAFTS (FOR ERECTION AND MAINTENANCE ONLY)																																																																																																																																																																																																																																																																																																																																																																																																																											
BF	FOUNDATIONS																																																																																																																																																																																																																																																																																																																																																																																																																											
BG	BOILER HEATING SURFACES																																																																																																																																																																																																																																																																																																																																																																																																																											
BN	JET PUMPS, EJECTORS, INJECTORS																																																																																																																																																																																																																																																																																																																																																																																																																											
BP	FLOW RESTRICTORS AND LIMITERS (INCL. RUPTURE DISCS), ORIFICES (NOT METERING ORIFICES)																																																																																																																																																																																																																																																																																																																																																																																																																											
BQ	HANGERS, SUPPORTS, FRAMES, RACKS, PIPE PENETRATIONS																																																																																																																																																																																																																																																																																																																																																																																																																											
BR	PIPING, DUCTWORK, CHUTES																																																																																																																																																																																																																																																																																																																																																																																																																											
BS	SILENCERS																																																																																																																																																																																																																																																																																																																																																																																																																											
BT	CATALYTIC CONVERTER MODULES																																																																																																																																																																																																																																																																																																																																																																																																																											
BU	INSULATION, SHEETING																																																																																																																																																																																																																																																																																																																																																																																																																											
BY	MECHANICALLY OPERATED CONTROLLERS (CONTROL UNITS)																																																																																																																																																																																																																																																																																																																																																																																																																											
BZ	SPECIAL EQUIPMENT UNITS																																																																																																																																																																																																																																																																																																																																																																																																																											
C	DIRECT MEASURING CIRCUITS																																																																																																																																																																																																																																																																																																																																																																																																																											
CD	DENSITY																																																																																																																																																																																																																																																																																																																																																																																																																											
CE	ELECTRICAL VARIABLES																																																																																																																																																																																																																																																																																																																																																																																																																											
CF	FLOW RATE																																																																																																																																																																																																																																																																																																																																																																																																																											
CG	DISTANCE, LENGTH, POSITION																																																																																																																																																																																																																																																																																																																																																																																																																											
CK	TIME																																																																																																																																																																																																																																																																																																																																																																																																																											
CL	LEVEL																																																																																																																																																																																																																																																																																																																																																																																																																											
CM	MOISTURE, HUMIDITY																																																																																																																																																																																																																																																																																																																																																																																																																											
CP	PRESSURE																																																																																																																																																																																																																																																																																																																																																																																																																											
CQ	QUALITY VARIABLES (ANALYSIS, MATERIAL PROPERTIES)																																																																																																																																																																																																																																																																																																																																																																																																																											
CR	RADIATION VARIABLES																																																																																																																																																																																																																																																																																																																																																																																																																											
CS	VELOCITY, SPEED, FREQUENCY																																																																																																																																																																																																																																																																																																																																																																																																																											
CT	TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																											
CU	COMBINED VARIABLES																																																																																																																																																																																																																																																																																																																																																																																																																											
CV	VISCOOSITY																																																																																																																																																																																																																																																																																																																																																																																																																											
CW	WEIGHT, MASS																																																																																																																																																																																																																																																																																																																																																																																																																											
CX	NEUTRON FLUX (REACTOR POWER)																																																																																																																																																																																																																																																																																																																																																																																																																											
CY	VIBRATION, EXPANSION																																																																																																																																																																																																																																																																																																																																																																																																																											
D	CLOSED LOOP CONTROL CIRCUITS																																																																																																																																																																																																																																																																																																																																																																																																																											
DD	DENSITY																																																																																																																																																																																																																																																																																																																																																																																																																											
DE	ELECTRICAL VARIABLES																																																																																																																																																																																																																																																																																																																																																																																																																											
DF	FLOW RATE																																																																																																																																																																																																																																																																																																																																																																																																																											
DG	DISTANCE, LENGTH, POSITION																																																																																																																																																																																																																																																																																																																																																																																																																											
DK	TIME																																																																																																																																																																																																																																																																																																																																																																																																																											
DL	LEVEL																																																																																																																																																																																																																																																																																																																																																																																																																											
DM	MOISTURE, HUMIDITY																																																																																																																																																																																																																																																																																																																																																																																																																											
DP	PRESSURE																																																																																																																																																																																																																																																																																																																																																																																																																											
DQ	QUALITY VARIABLES (ANALYSIS, MATERIAL PROPERTIES)																																																																																																																																																																																																																																																																																																																																																																																																																											
DR	RADIATION VARIABLES																																																																																																																																																																																																																																																																																																																																																																																																																											
DS	VELOCITY, SPEED, FREQUENCY																																																																																																																																																																																																																																																																																																																																																																																																																											
DT	TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																											
DU	COMBINED VARIABLES																																																																																																																																																																																																																																																																																																																																																																																																																											
DV	VISCOOSITY																																																																																																																																																																																																																																																																																																																																																																																																																											
DW	WEIGHT, MASS																																																																																																																																																																																																																																																																																																																																																																																																																											
DX	NEUTRON FLUX (REACTOR POWER)																																																																																																																																																																																																																																																																																																																																																																																																																											
DY	VIBRATION, EXPANSION																																																																																																																																																																																																																																																																																																																																																																																																																											
E	ANALOG AND BINARY SIGNAL CONDITIONING																																																																																																																																																																																																																																																																																																																																																																																																																											
EA	OPEN-LOOP CONTROL																																																																																																																																																																																																																																																																																																																																																																																																																											
EB	SUBDIVISION																																																																																																																																																																																																																																																																																																																																																																																																																											
EC	POSSIBLE																																																																																																																																																																																																																																																																																																																																																																																																																											
ED	AS REQUIRED																																																																																																																																																																																																																																																																																																																																																																																																																											
EE																																																																																																																																																																																																																																																																																																																																																																																																																												
EG	ALARM, ANNUNCIATION																																																																																																																																																																																																																																																																																																																																																																																																																											
EH	SUBDIVISION																																																																																																																																																																																																																																																																																																																																																																																																																											
EJ	POSSIBLE																																																																																																																																																																																																																																																																																																																																																																																																																											
EK	AS REQUIRED																																																																																																																																																																																																																																																																																																																																																																																																																											
EM	PROCESS COMPUTER																																																																																																																																																																																																																																																																																																																																																																																																																											
EN	SUBDIVISION																																																																																																																																																																																																																																																																																																																																																																																																																											
EP	POSSIBLE																																																																																																																																																																																																																																																																																																																																																																																																																											
EQ	AS REQUIRED																																																																																																																																																																																																																																																																																																																																																																																																																											
ER	REACTOR PROTECTION																																																																																																																																																																																																																																																																																																																																																																																																																											
EU	COMBINED ANALOG AND BINARY SIGNAL CONDITIONING																																																																																																																																																																																																																																																																																																																																																																																																																											
EW	PROTECTION																																																																																																																																																																																																																																																																																																																																																																																																																											
EX	SUBDIVISION																																																																																																																																																																																																																																																																																																																																																																																																																											
EY	POSSIBLE																																																																																																																																																																																																																																																																																																																																																																																																																											
EZ	AS REQUIRED																																																																																																																																																																																																																																																																																																																																																																																																																											
F	INDIRECT MEASURING CIRCUITS																																																																																																																																																																																																																																																																																																																																																																																																																											
FD	DENSITY																																																																																																																																																																																																																																																																																																																																																																																																																											
FE	ELECTRICAL VARIABLES																																																																																																																																																																																																																																																																																																																																																																																																																											
FF	FLOW, RATE																																																																																																																																																																																																																																																																																																																																																																																																																											
FG	DISTANCE, LENGTH, POSITION																																																																																																																																																																																																																																																																																																																																																																																																																											
FK	TIME																																																																																																																																																																																																																																																																																																																																																																																																																											
FL	LEVEL																																																																																																																																																																																																																																																																																																																																																																																																																											
FM	MOISTURE, HUMIDITY																																																																																																																																																																																																																																																																																																																																																																																																																											
FP	PRESSURE																																																																																																																																																																																																																																																																																																																																																																																																																											
FQ	QUALITY VARIABLES (ANALYSIS, MATERIAL, PROPERTIES)																																																																																																																																																																																																																																																																																																																																																																																																																											
FR	RADIATION VARIABLES																																																																																																																																																																																																																																																																																																																																																																																																																											
FS	VELOCITY, SPEED, FREQUENCY																																																																																																																																																																																																																																																																																																																																																																																																																											
FT	TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																											
FU	COMBINED VARIABLES																																																																																																																																																																																																																																																																																																																																																																																																																											
FV	VISCOOSITY																																																																																																																																																																																																																																																																																																																																																																																																																											
FW	WEIGHT, MASS																																																																																																																																																																																																																																																																																																																																																																																																																											
FX	NEUTRON FLUX (REACTOR POWER)																																																																																																																																																																																																																																																																																																																																																																																																																											
FY	VIBRATION, EXPANSION																																																																																																																																																																																																																																																																																																																																																																																																																											
G	ELECTRICAL EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
GA	JUNCTION BOXES FOR ANALOG MEASURED DATA																																																																																																																																																																																																																																																																																																																																																																																																																											
GB	JUNCTION BOXES FOR BINARY SIGNALS																																																																																																																																																																																																																																																																																																																																																																																																																											
GC	JUNCTION BOXES FOR ANALOG SAFETY I&C (SIL) MEASURED DATA																																																																																																																																																																																																																																																																																																																																																																																																																											
GD	JUNCTION BOXES FOR POWER CABLES > 1 KV																																																																																																																																																																																																																																																																																																																																																																																																																											
GE	JUNCTION BOXES FOR POWER CABLES < 1 KV																																																																																																																																																																																																																																																																																																																																																																																																																											
GF	JUNCTION BOXES FOR OPERATIONAL I&C (BELT) MEASURED DATA																																																																																																																																																																																																																																																																																																																																																																																																																											
GG	JUNCTION BOXES FOR THERMOCOUPLES																																																																																																																																																																																																																																																																																																																																																																																																																											
GH	ELECTRICAL AND INSTRUMENTATION AND CONTROL INSTALLATION UNITS (E.G. CUBICLES, BOXES)																																																																																																																																																																																																																																																																																																																																																																																																																											
GK	INFORMATION DISPLAY AND OPERATOR CONTROL EQUIPMENT FOR PROCESS COMPUTERS AND AUTOMATION SYSTEMS (KEYBOARDS, MONITORS, PRINTERS)																																																																																																																																																																																																																																																																																																																																																																																																																											
GM	JUNCTION BOXES FOR LIGHT CURRENT SYSTEMS OF NATIONAL TELECOMMUNICATIONS SERVICES																																																																																																																																																																																																																																																																																																																																																																																																																											
GN	NETWORKING EQUIPMENT (BUS COUPLERS AND OPTIC TRANSCIVERS, ETC.)																																																																																																																																																																																																																																																																																																																																																																																																																											
GP	SUBDISTRIBUTION/JUNCTION BOXES FOR LIGHTING																																																																																																																																																																																																																																																																																																																																																																																																																											
GQ	SUBDISTRIBUTION/JUNCTION BOXES FOR POWER SOCKETS																																																																																																																																																																																																																																																																																																																																																																																																																											
GR	DC GENERATING EQUIPMENT (BATTERIES)																																																																																																																																																																																																																																																																																																																																																																																																																											
GS	SWITCHGEAR EQUIPMENT (IF NOT IDENTIFIED UNDER PROCESS EQUIPMENT)																																																																																																																																																																																																																																																																																																																																																																																																																											
GT	TRANSFORMER EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
GU	CONVERTER EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
GV	STRUCTURE-RELATED EARTHING AND LIGHTNING PROTECTION EQUIPMENT, SURGE ARRESTORS																																																																																																																																																																																																																																																																																																																																																																																																																											
GW	CABINET POWER SUPPLY EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
GX	ACTUATING EQUIPMENT FOR ELECTRICAL VARIABLES																																																																																																																																																																																																																																																																																																																																																																																																																											
GY	JUNCTION BOXES FOR LIGHT CURRENT SYSTEMS (NOT OF NATIONAL TELECOMMUNICATIONS SERVICES)																																																																																																																																																																																																																																																																																																																																																																																																																											
GZ	HANGERS, SUPPORTS AND RACKS FOR ELECTRICAL AND JUNCTION BOXES FOR LIGHT CURRENT SYSTEMS INSTRUMENTATION AND CONTROL EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																											
NUMBER RANGE	VALVES (AA...)	PIPES (BR...)	MEASURING CIRCUITS (C...)																																																																																																																																																																																																																																																																																																																																																																																																																									
001-050	MOTOR OPERATED VALVES	MAIN PIPES	001-079 : ANALOG MEASUREMENT																																																																																																																																																																																																																																																																																																																																																																																																																									
051-080	CHECK VALVES																																																																																																																																																																																																																																																																																																																																																																																																																											
081-100	CONTROL VALVES	NOT USED																																																																																																																																																																																																																																																																																																																																																																																																																										
101-190	VALVES IN MAIN PIPES																																																																																																																																																																																																																																																																																																																																																																																																																											
191-199	SAFETY VALVES	UPSTREAM AND DOWNSTREAM LINES OF SAFETY AND PRESSURE RELIEF VALVES	080-099 : BINARY MEASUREMENT																																																																																																																																																																																																																																																																																																																																																																																																																									
201-249	CHECK VALVES	NOT USED																																																																																																																																																																																																																																																																																																																																																																																																																										
251-299	NOT USED		FOR TESTING EQUIPMENT																																																																																																																																																																																																																																																																																																																																																																																																																									
301-399	ISOLATING EQUIPMENT FOR MEASURING	PRESSURE LINES FOR MEASUREMENT	NOT USED																																																																																																																																																																																																																																																																																																																																																																																																																									
401-499	VALVES IN DRAINS AND FLUSHING PIPES	DRAINS, FLUSHING PIPES, PRESSURE SUPPRESSION PIPES	ACCEPTANCE TESTS																																																																																																																																																																																																																																																																																																																																																																																																																									
501-599	VALVES FOR VENTING	VENTING	LOCAL MEASURING CIRCUITS																																																																																																																																																																																																																																																																																																																																																																																																																									
601-699	VALVES IN SAMPLING AND PROPORTIONING	SAMPLING AND PROPORTIONING PIPES	ELEMENT (SENSORS)																																																																																																																																																																																																																																																																																																																																																																																																																									
701-799	VALVES FOR INTERNAL CONTROLS	INTERNAL CONTROL PIPES	BLOCKED																																																																																																																																																																																																																																																																																																																																																																																																																									
801-899	NOT USED	NOT USED	BLOCKED																																																																																																																																																																																																																																																																																																																																																																																																																									
901-999	NOT USED	NOT USED	GROUPED MEASURING CIRCUITS (e.g. MULTIPoint SELECTOR SWITCHED, MULTI CHANNEL RECORDERS)																																																																																																																																																																																																																																																																																																																																																																																																																									
EXAMPLE																																																																																																																																																																																																																																																																																																																																																																																																																												
DIRECTION OF FLOW																																																																																																																																																																																																																																																																																																																																																																																																																												
DIRECTION OF FLOW																																																																																																																																																																																																																																																																																																																																																																																																																												
FLOW FOR BOTH DIRECTION																																																																																																																																																																																																																																																																																																																																																																																																																												
	PLANT CODE SYSTEM CODE LINE NUMBER PIPE DESIGNATION NOMINAL DIAMETER(DN) PIPE																																																																																																																																																																																																																																																																																																																																																																																																																											
DOC/DWG NO.	TITLE																																																																																																																																																																																																																																																																																																																																																																																																																											
JCP2-DA01-00ZEN-020001	DOCUMENT IDENTIFICATION																																																																																																																																																																																																																																																																																																																																																																																																																											
JCP2-DA01-00ZEN-020002	EQUIPMENT AND SYSTEM IDENTIFICATION																																																																																																																																																																																																																																																																																																																																																																																																																											
B	30.May.2025	ISSUED FOR APPROVAL	Y.J.KIM	C.K.HONG																																																																																																																																																																																																																																																																																																																																																																																																																								
A	25.Apr.2025	ISSUED FOR APPROVAL	Y.J.KIM	C.K.HONG																																																																																																																																																																																																																																																																																																																																																																																																																								
REV. NO.	DATE	DESCRIPTION	DRAWN	CHKD.																																																																																																																																																																																																																																																																																																																																																																																																																								

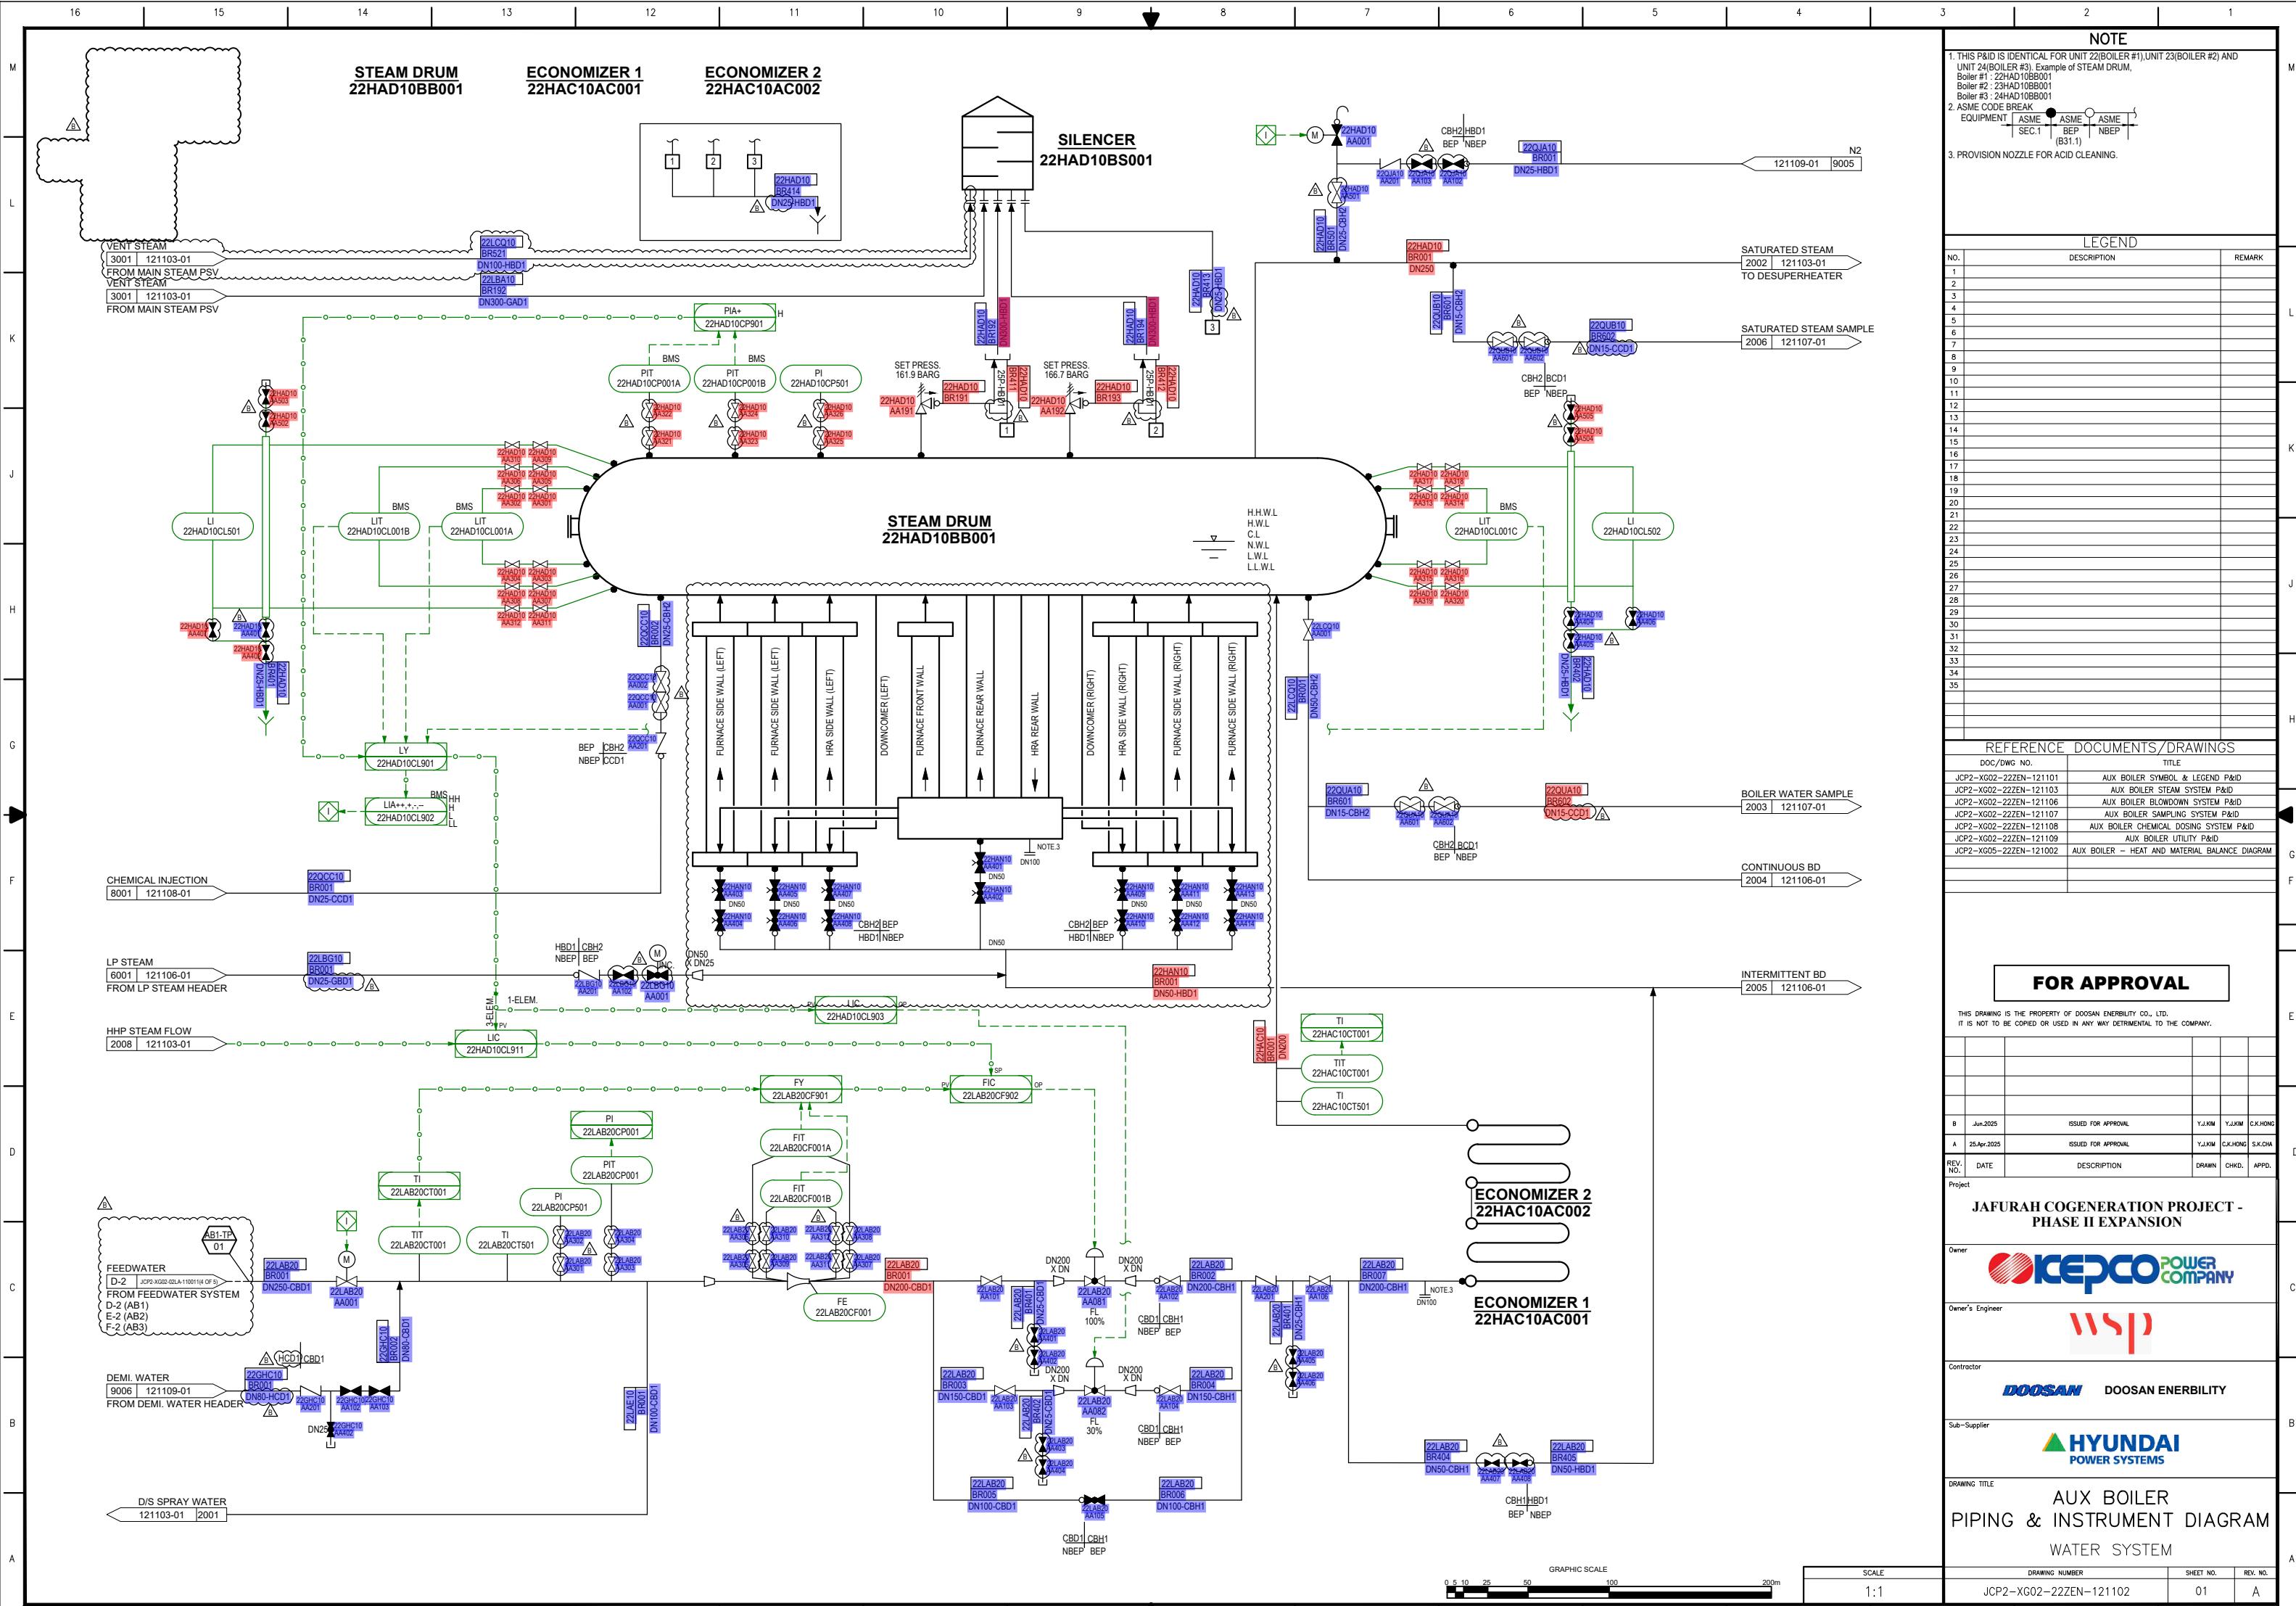

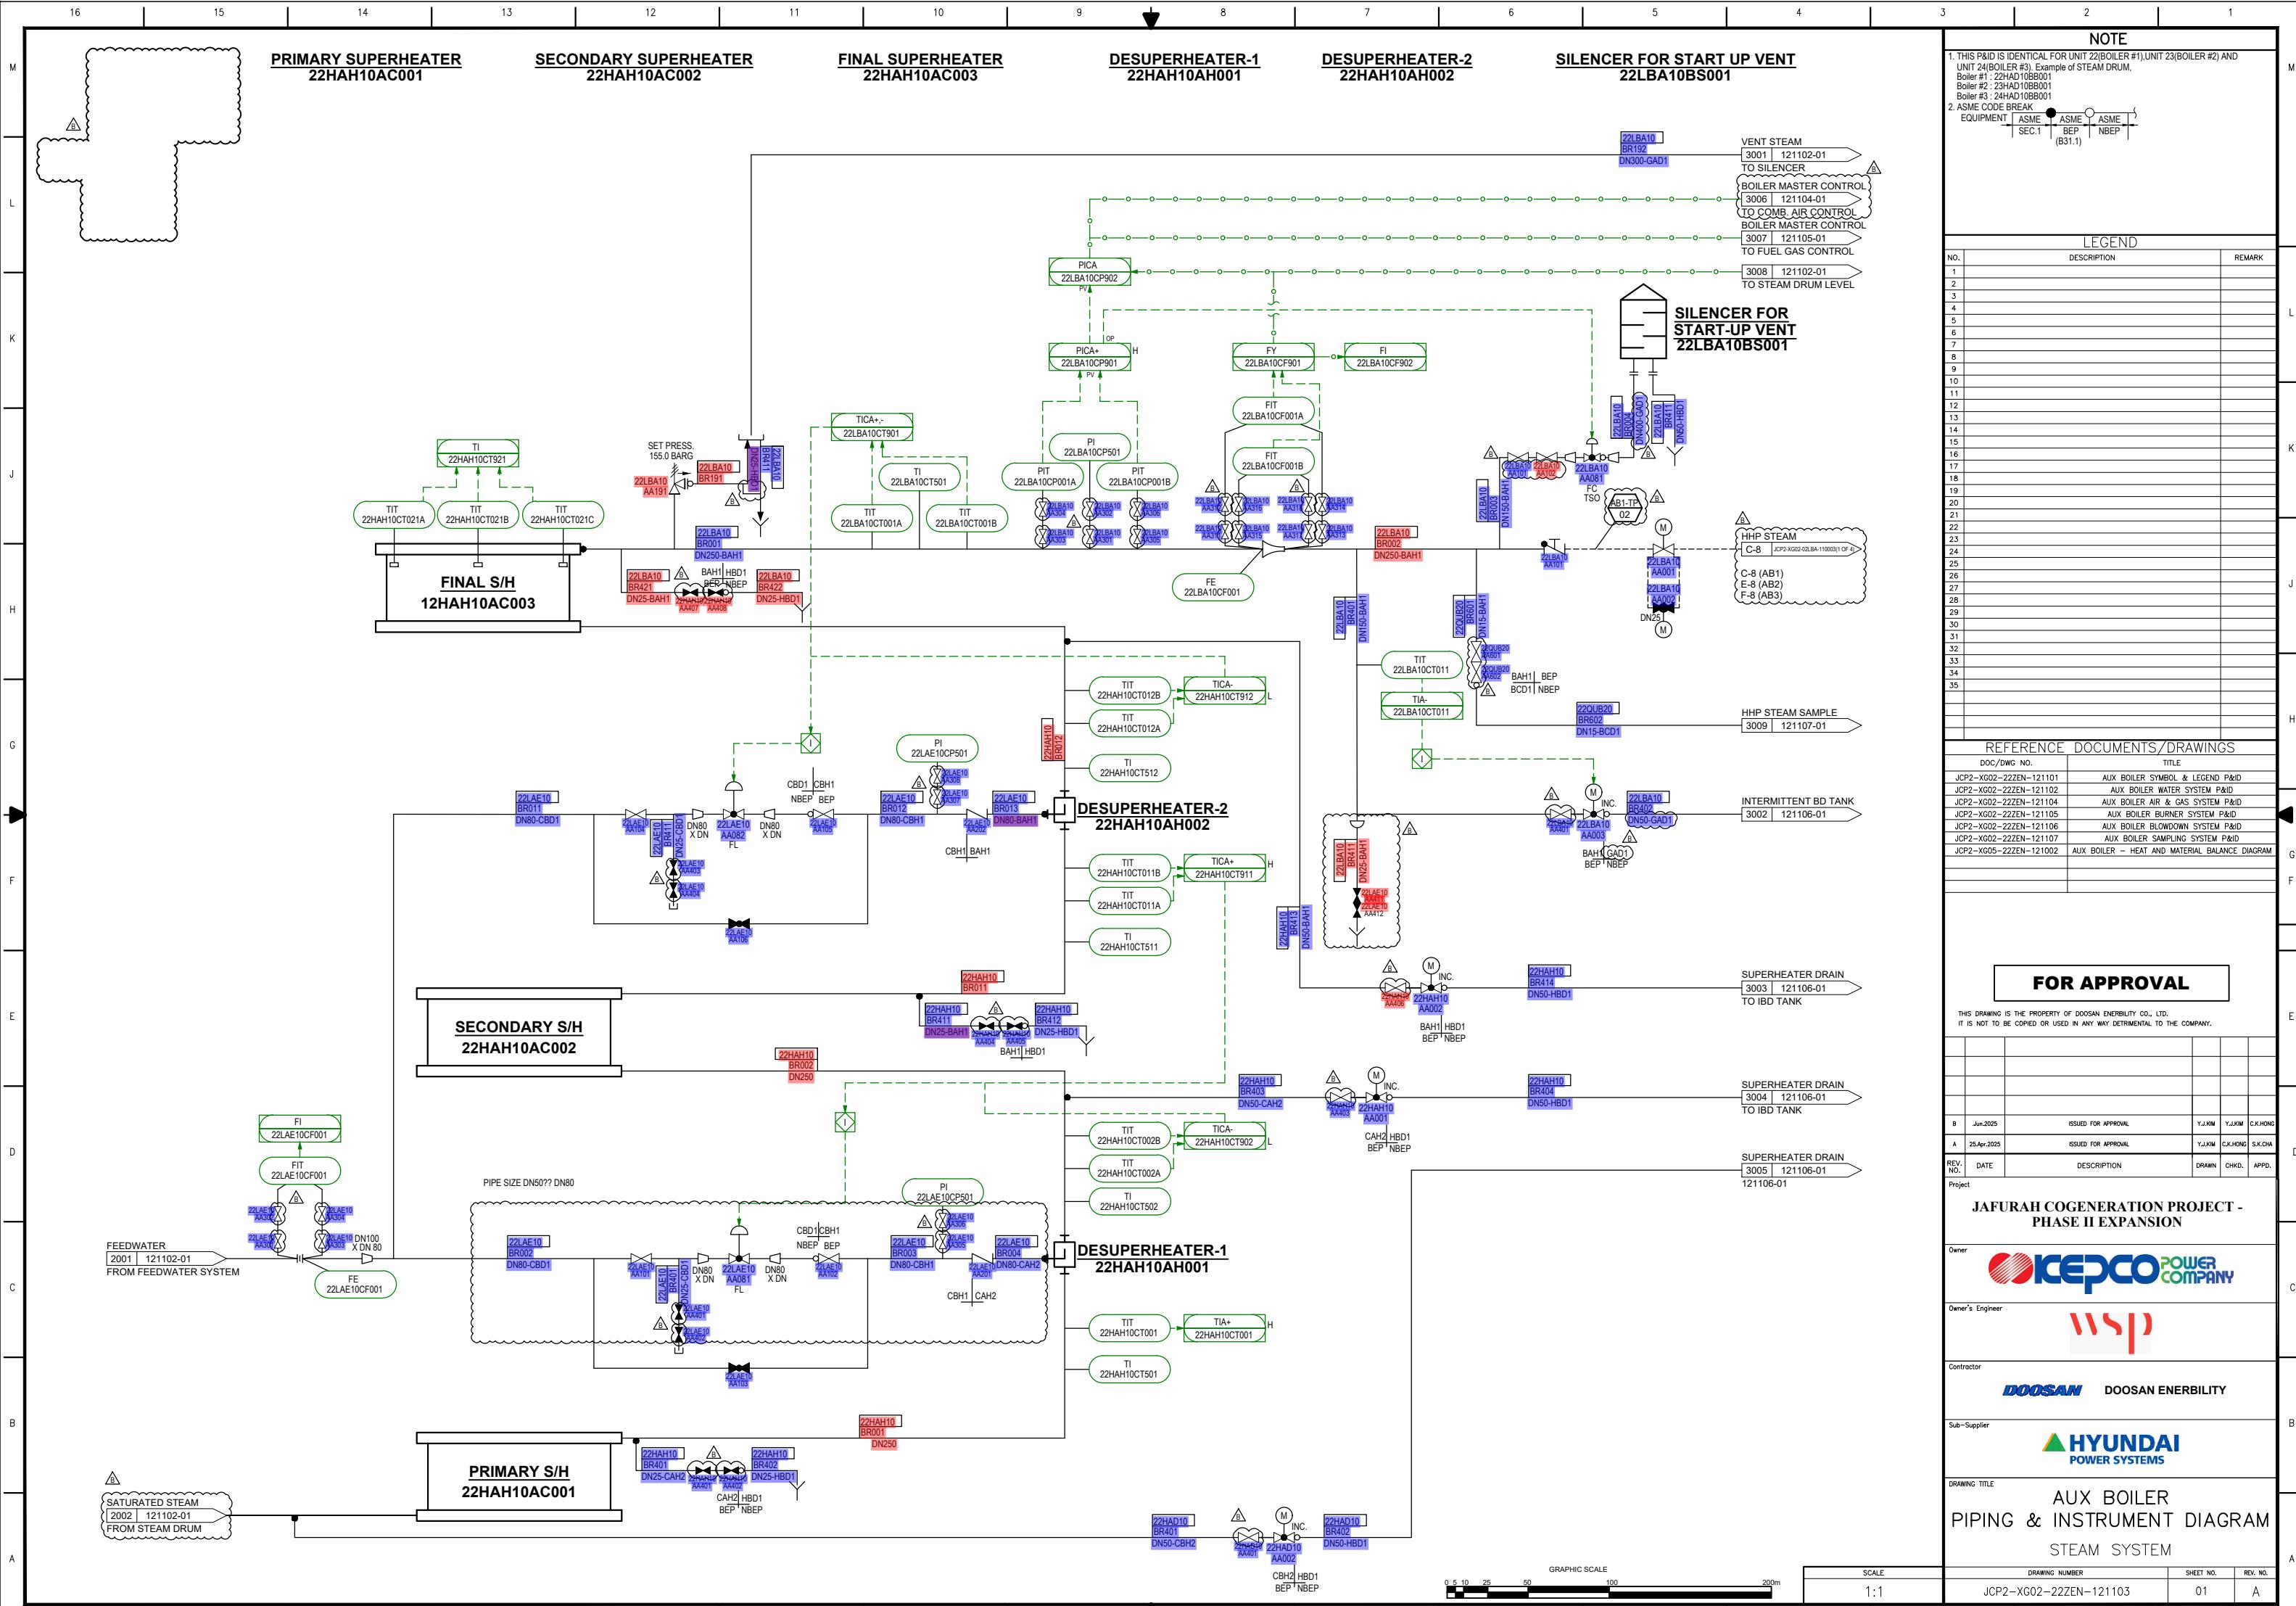

NOTE

1. THIS P&ID IS IDENTICAL FOR UNIT 22(BOILER #1), UNIT 23(BOILER #2) AND UNIT 24(BOILER #3). Example of STEAM DRUM.
 Boiler #1 : 22HAD10BB001
 Boiler #2 : 23HAD10BB001
 Boiler #3 : 24HAD10BB001
 2. NOZZLE CONNECTION FOR CEMS
 NOx, SOx : ANSI #150 5" FF
 O2 : ANSI #150 4" FF
 VELOCITY, TEMP : ANSI #150 2" FF
 DUST : ANSI #150 2" FF(2EA, CROSS DUCT)
 CO : ANSI #150 5" FF

LEGEND

NO.	DESCRIPTION	REMARK
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		

REFERENCE DOCUMENTS/DRAWINGS

DOC/DWG NO.	TITLE
JCP2-XG02-22ZEN-121101	AUX BOILER SYMBOL & LEGEND P&ID
JCP2-XG02-22ZEN-121103	AUX BOILER STEAM SYSTEM P&ID
JCP2-XG02-22ZEN-121105	AUX BOILER BURNER SYSTEM P&ID
JCP2-XG05-22ZEN-121002	AUX BOILER - HEAT AND MATERIAL BALANCE DIAGRAM

FOR APPROVAL

THIS DRAWING IS THE PROPERTY OF DOOSAN ENERBILITY CO., LTD.
 IT IS NOT TO BE COPIED OR USED IN ANY WAY DEDIMENTAL TO THE COMPANY.

B	Jun.2025	ISSUED FOR APPROVAL	Y.J.KIM	Y.J.KIM	C.K.HONG
A	25-Apr-2025	ISSUED FOR APPROVAL	Y.J.KIM	C.K.HONG	S.K.CHIA
REV. NO.	DATE	DESCRIPTION	DRAWN	CHKD.	APPD.

Project
JAFURAH COGENERATION PROJECT - PHASE II EXPANSION

Owner **ICEPCO POWER COMPANY**


WSP

Contractor **DOOSAN** DOOSAN ENERBILITY

Sub-Supplier **HYUNDAI** HYUNDAI POWER SYSTEMS

DRAWING TITLE
**AUX BOILER
PIPING & INSTRUMENT DIAGRAM
AIR & GAS SYSTEM**

DRAWING NUMBER **JCP2-XG02-22ZEN-121104** SHEET NO. **01** REV. NO. **A**

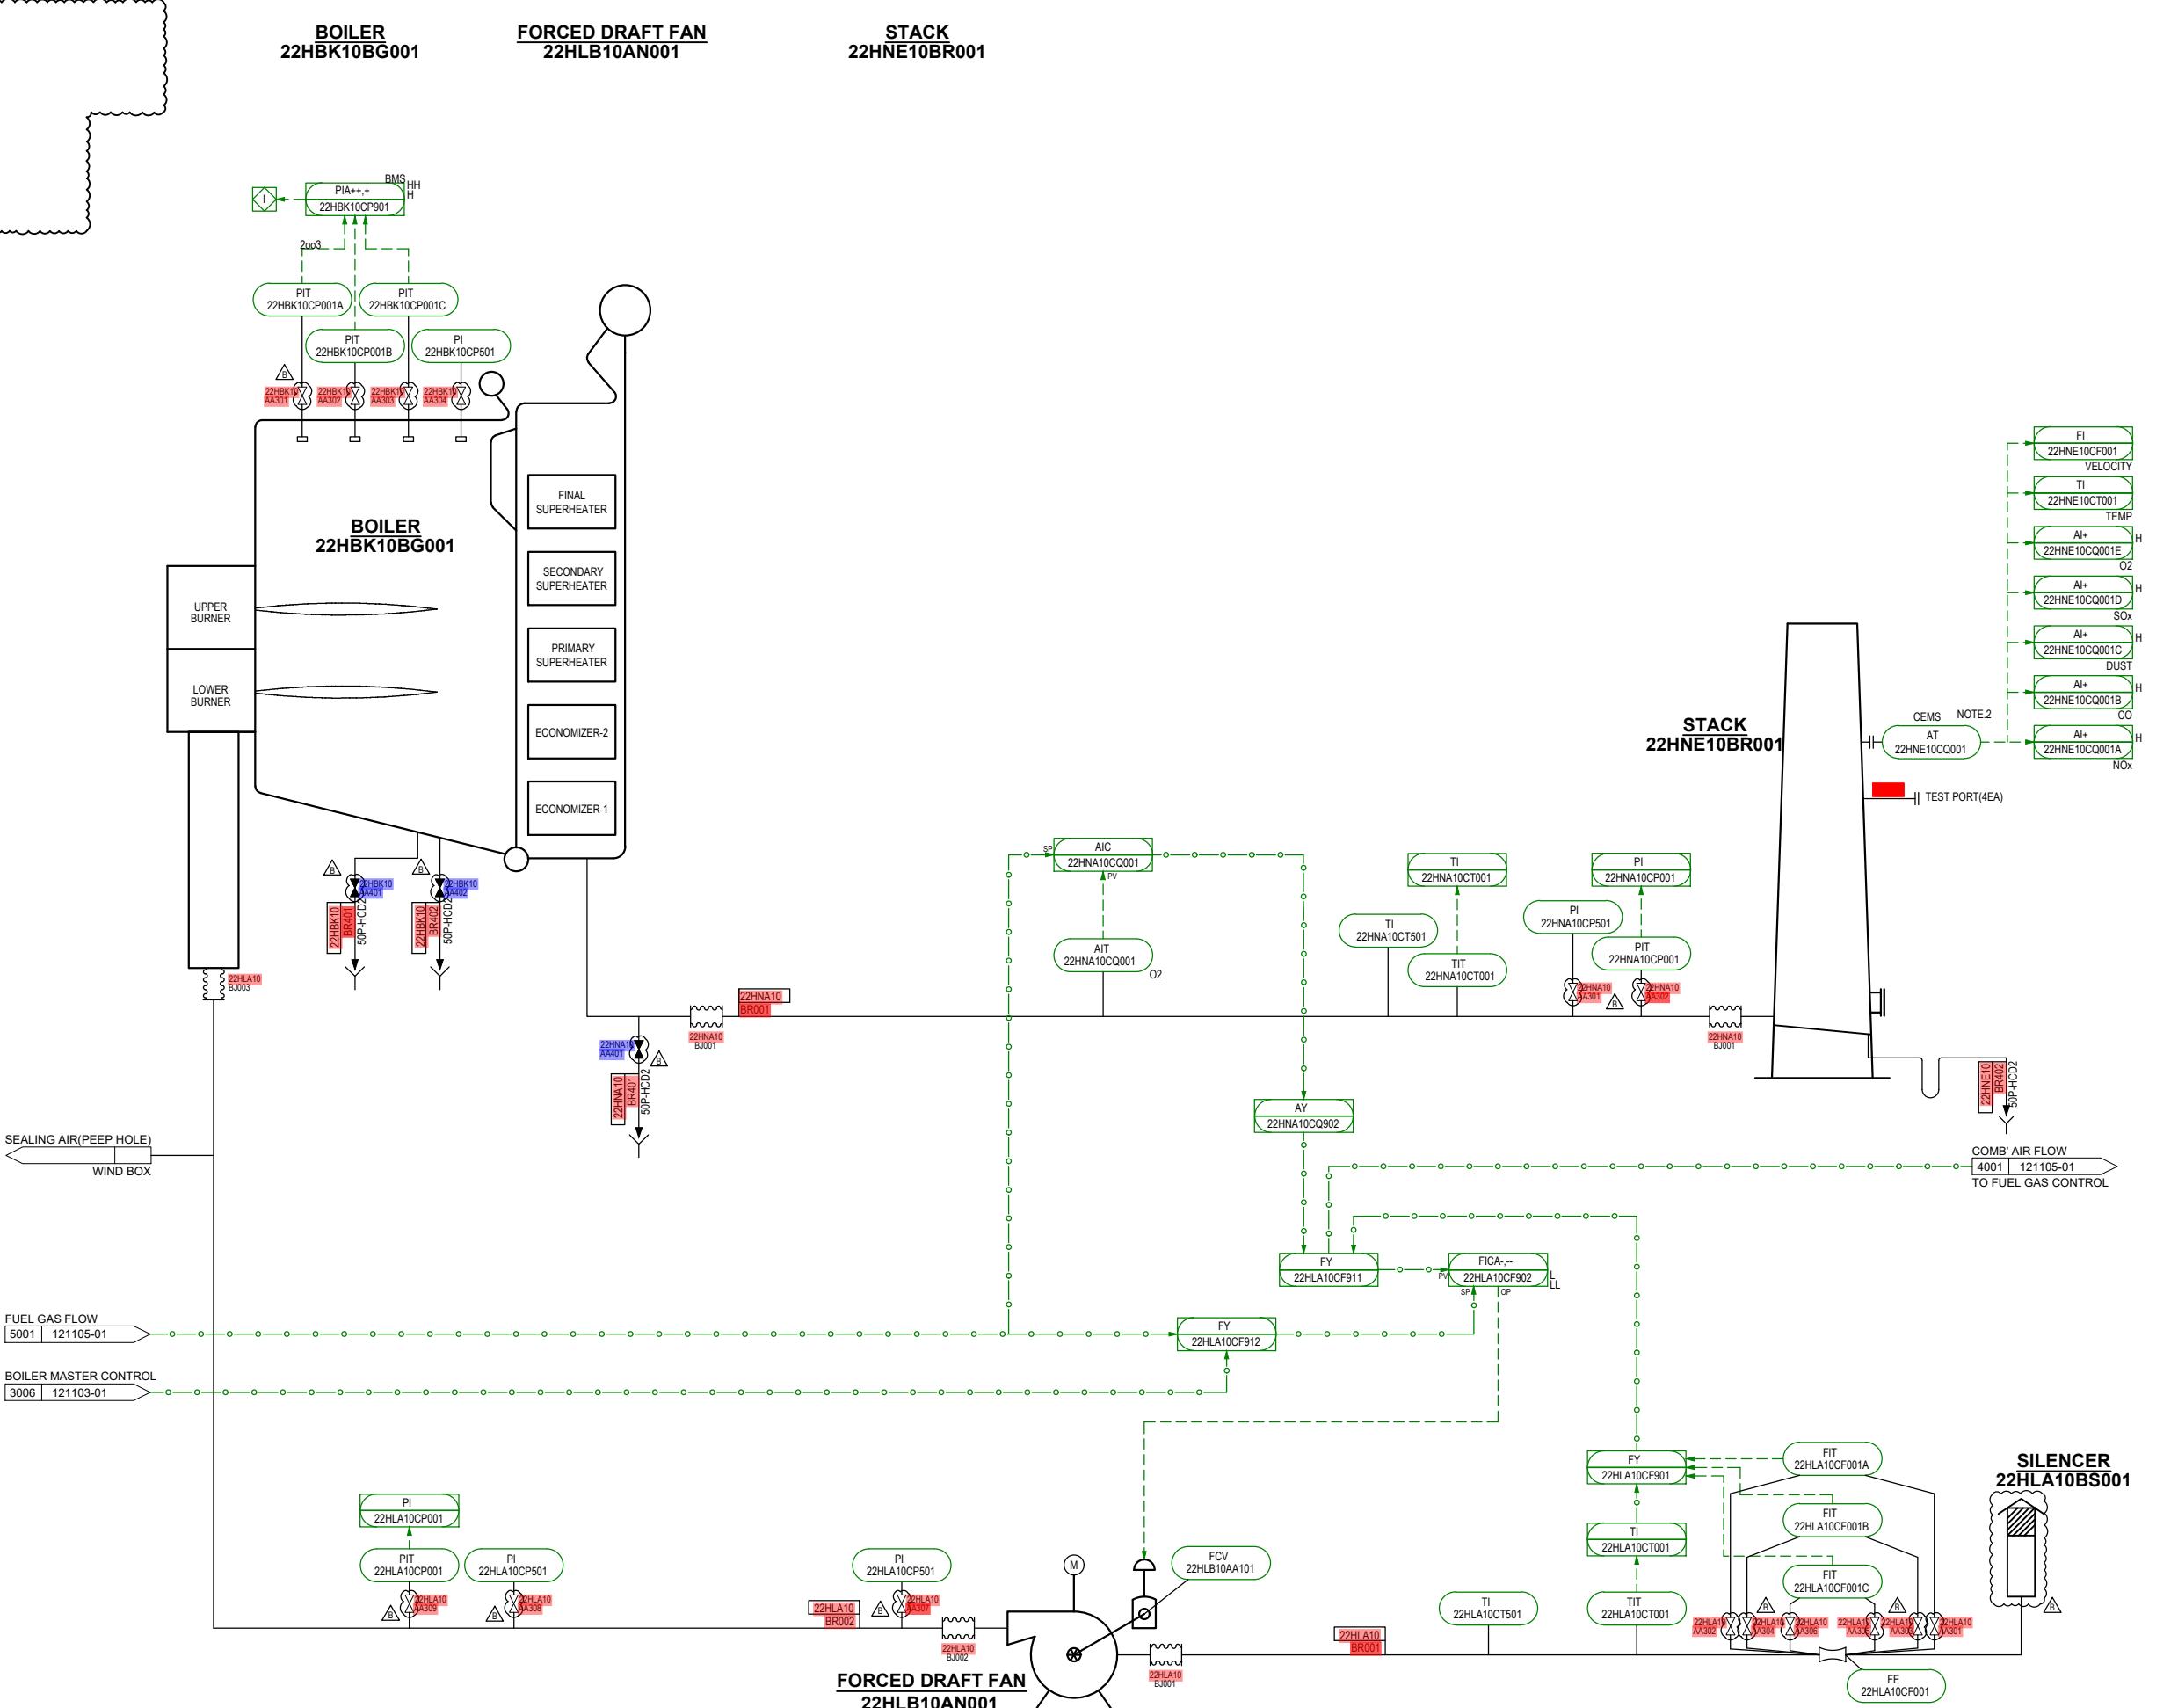

GRAPHIC SCALE 0 5 10 25 50 100 200m
 SCALE 1:1

A1 (841 x 594) 1

NOTE

1. THIS P&ID IS IDENTICAL FOR UNIT 22(BOILER #1), UNIT 23(BOILER #2) AND
UNIT 24(BOILER #3). Example of STEAM DRUM,
Boiler #1 : 22HAD10BB001
Boiler #2 : 23HAD10BB001
Boiler #3 : 24HAD10BB001

LEGEND

NO.	DESCRIPTION	REMARK
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		

REFERENCE DOCUMENTS/DRAWINGS

DOC/DWG NO.	TITLE
JCP2-XG02-22ZEN-121101	AUX BOILER SYMBOL & LEGEND P&ID
JCP2-XG02-22ZEN-121103	AUX BOILER STEAM SYSTEM P&ID
JCP2-XG02-22ZEN-121104	AUX BOILER AIR & GAS SYSTEM P&ID
JCP2-XG05-22ZEN-121002	AUX BOILER - HEAT AND MATERIAL BALANCE DIAGRAM

FOR APPROVAL

THIS DRAWING IS THE PROPERTY OF DOOSAN ENERBILITY CO., LTD.
IT IS NOT TO BE COPIED OR USED IN ANY WAY DEDIMENTAL TO THE COMPANY.

B	Jun.2025	ISSUED FOR APPROVAL	Y.J.KIM	C.K.HONG
A	25-Apr-2025	ISSUED FOR APPROVAL	Y.J.KIM	C.K.HONG
REV. NO.	DATE	DESCRIPTION	DRAWN	CHKD. APPD.

Project
JAFURAH COGENERATION PROJECT -
PHASE II EXPANSION

Owner
ICEPCO POWER COMPANY


Owner's Engineer
WSP

Contractor
DOOSAN DOOSAN ENERBILITY


Sub-Supplier
HYUNDAI POWER SYSTEMS

DRAWING TITLE
AUX BOILER
PIPING & INSTRUMENT DIAGRAM
BURNER SYSTEM (1/2)

SCALE
DRAWING NUMBER
SHEET NO.
REV. NO.
JCP2-XG02-22ZEN-121105
01 A

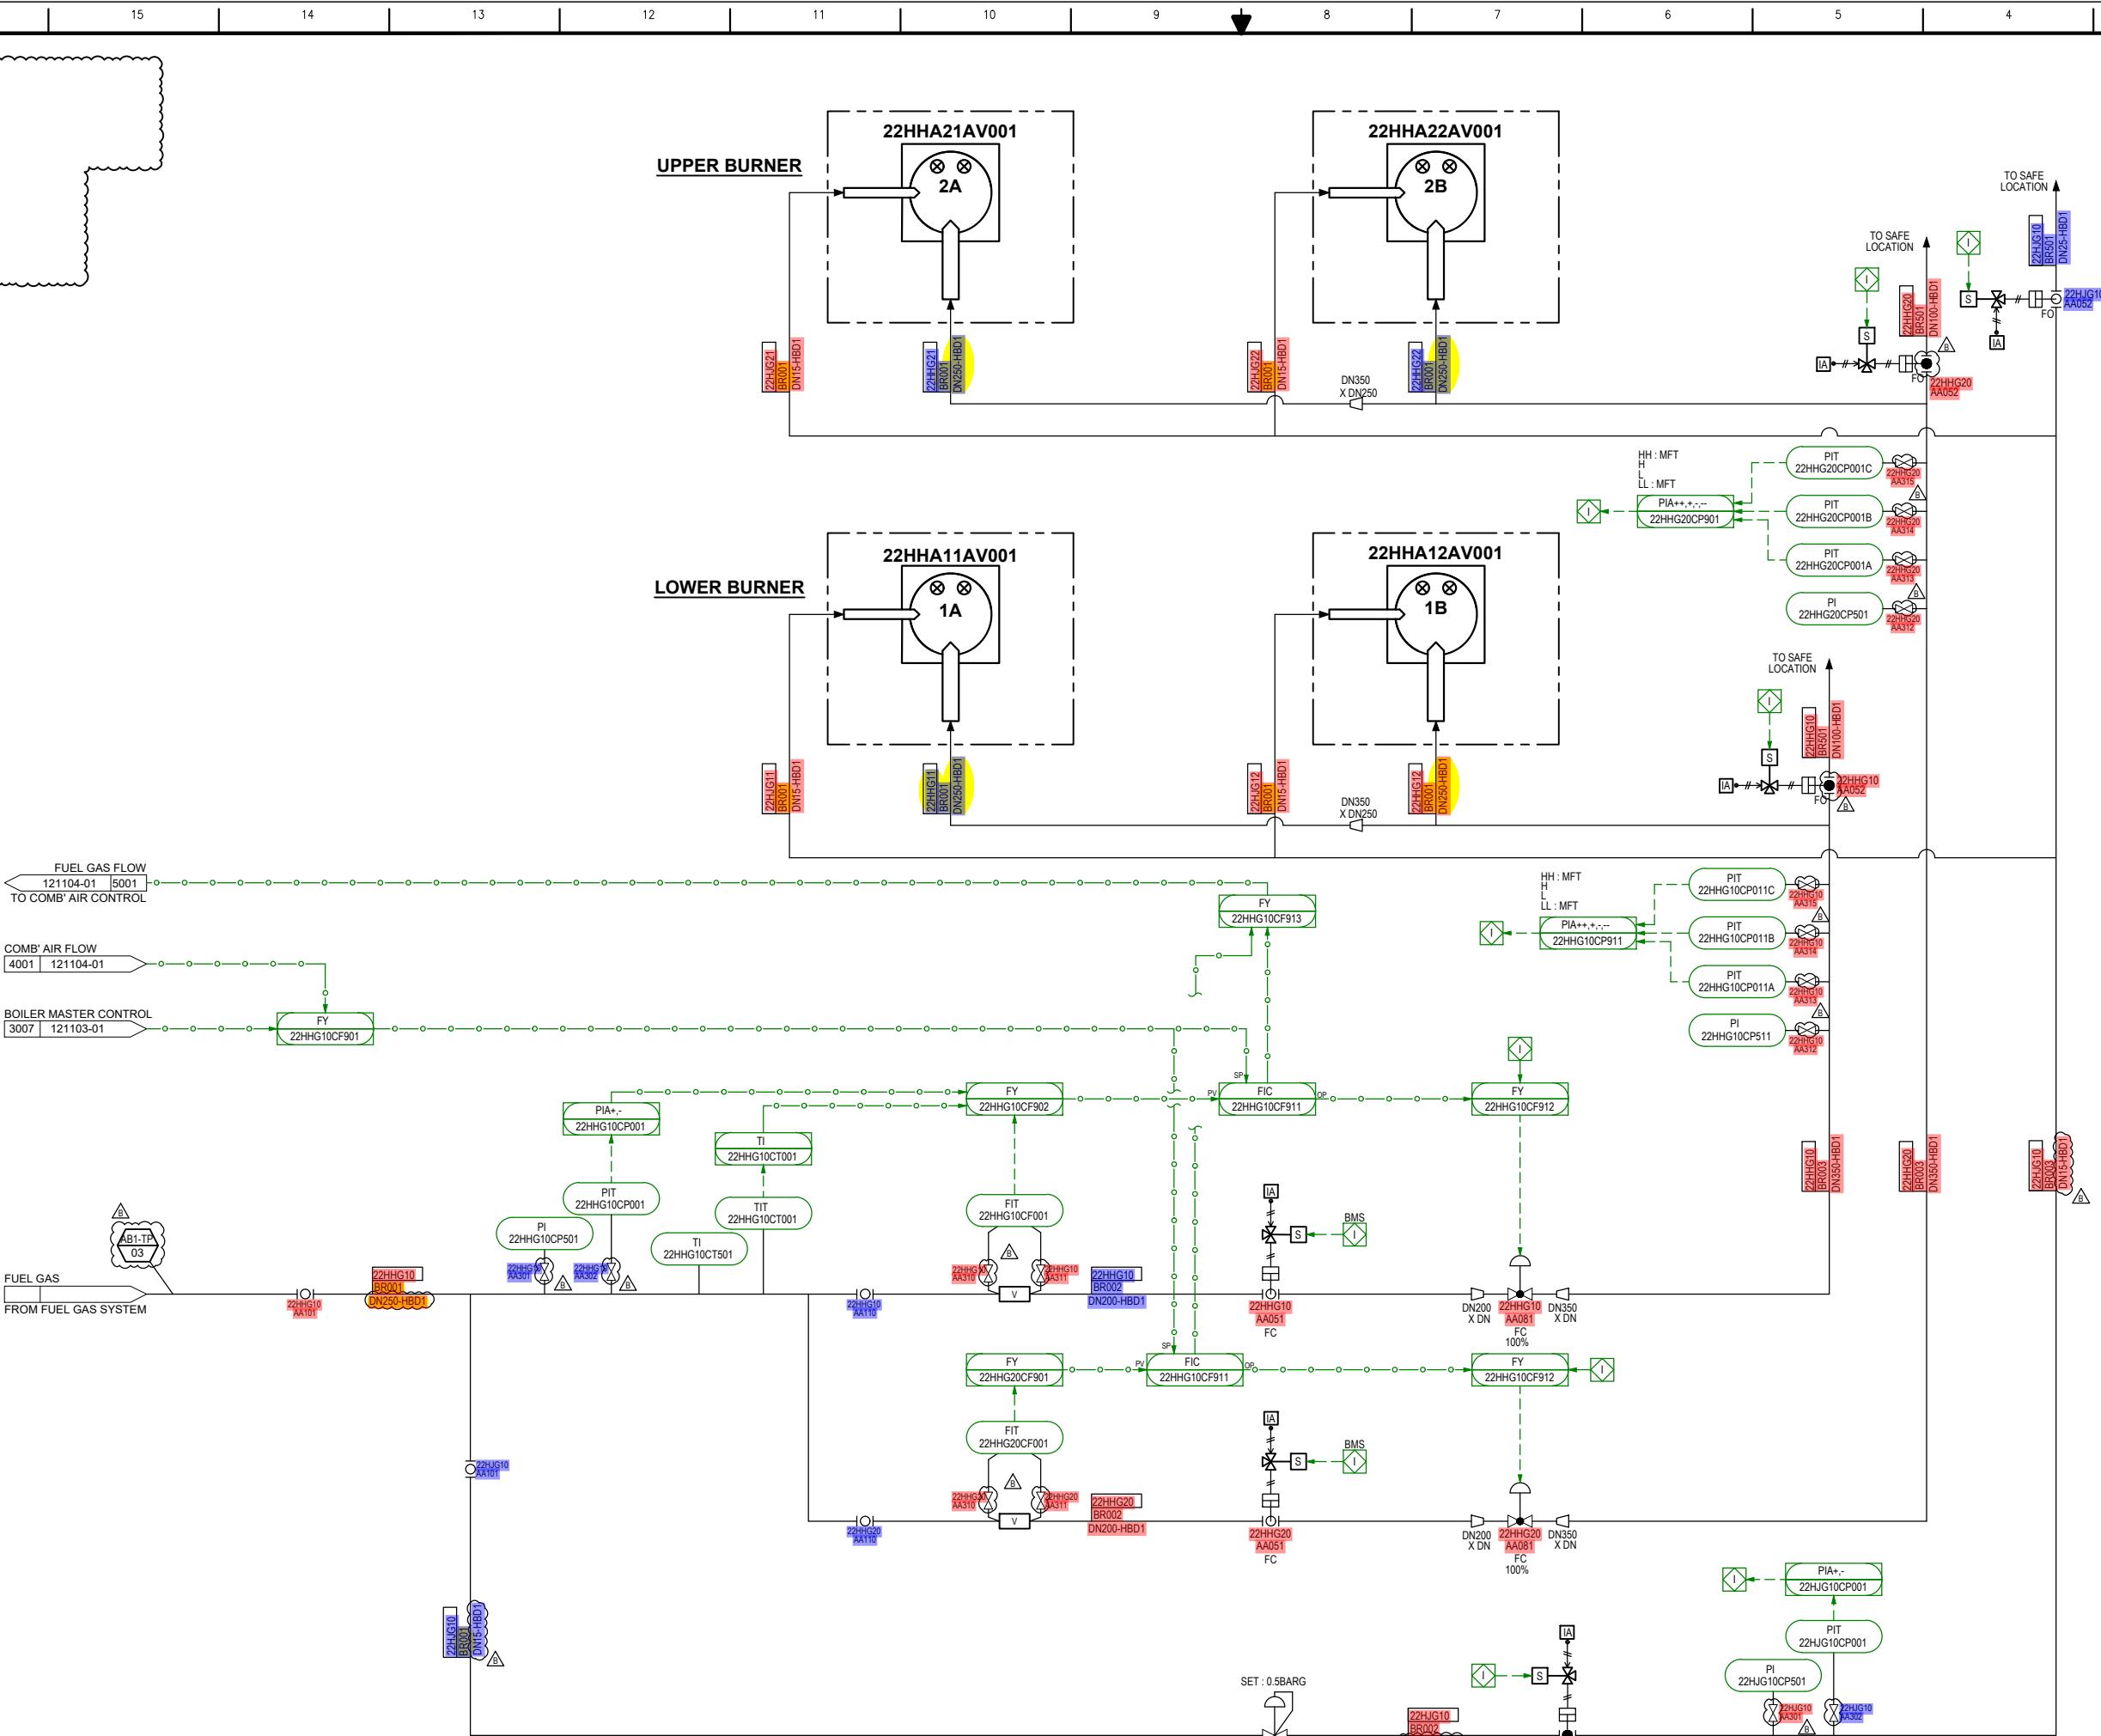

GRAPHIC SCALE
0 5 10 25 50 100 200m
1:1

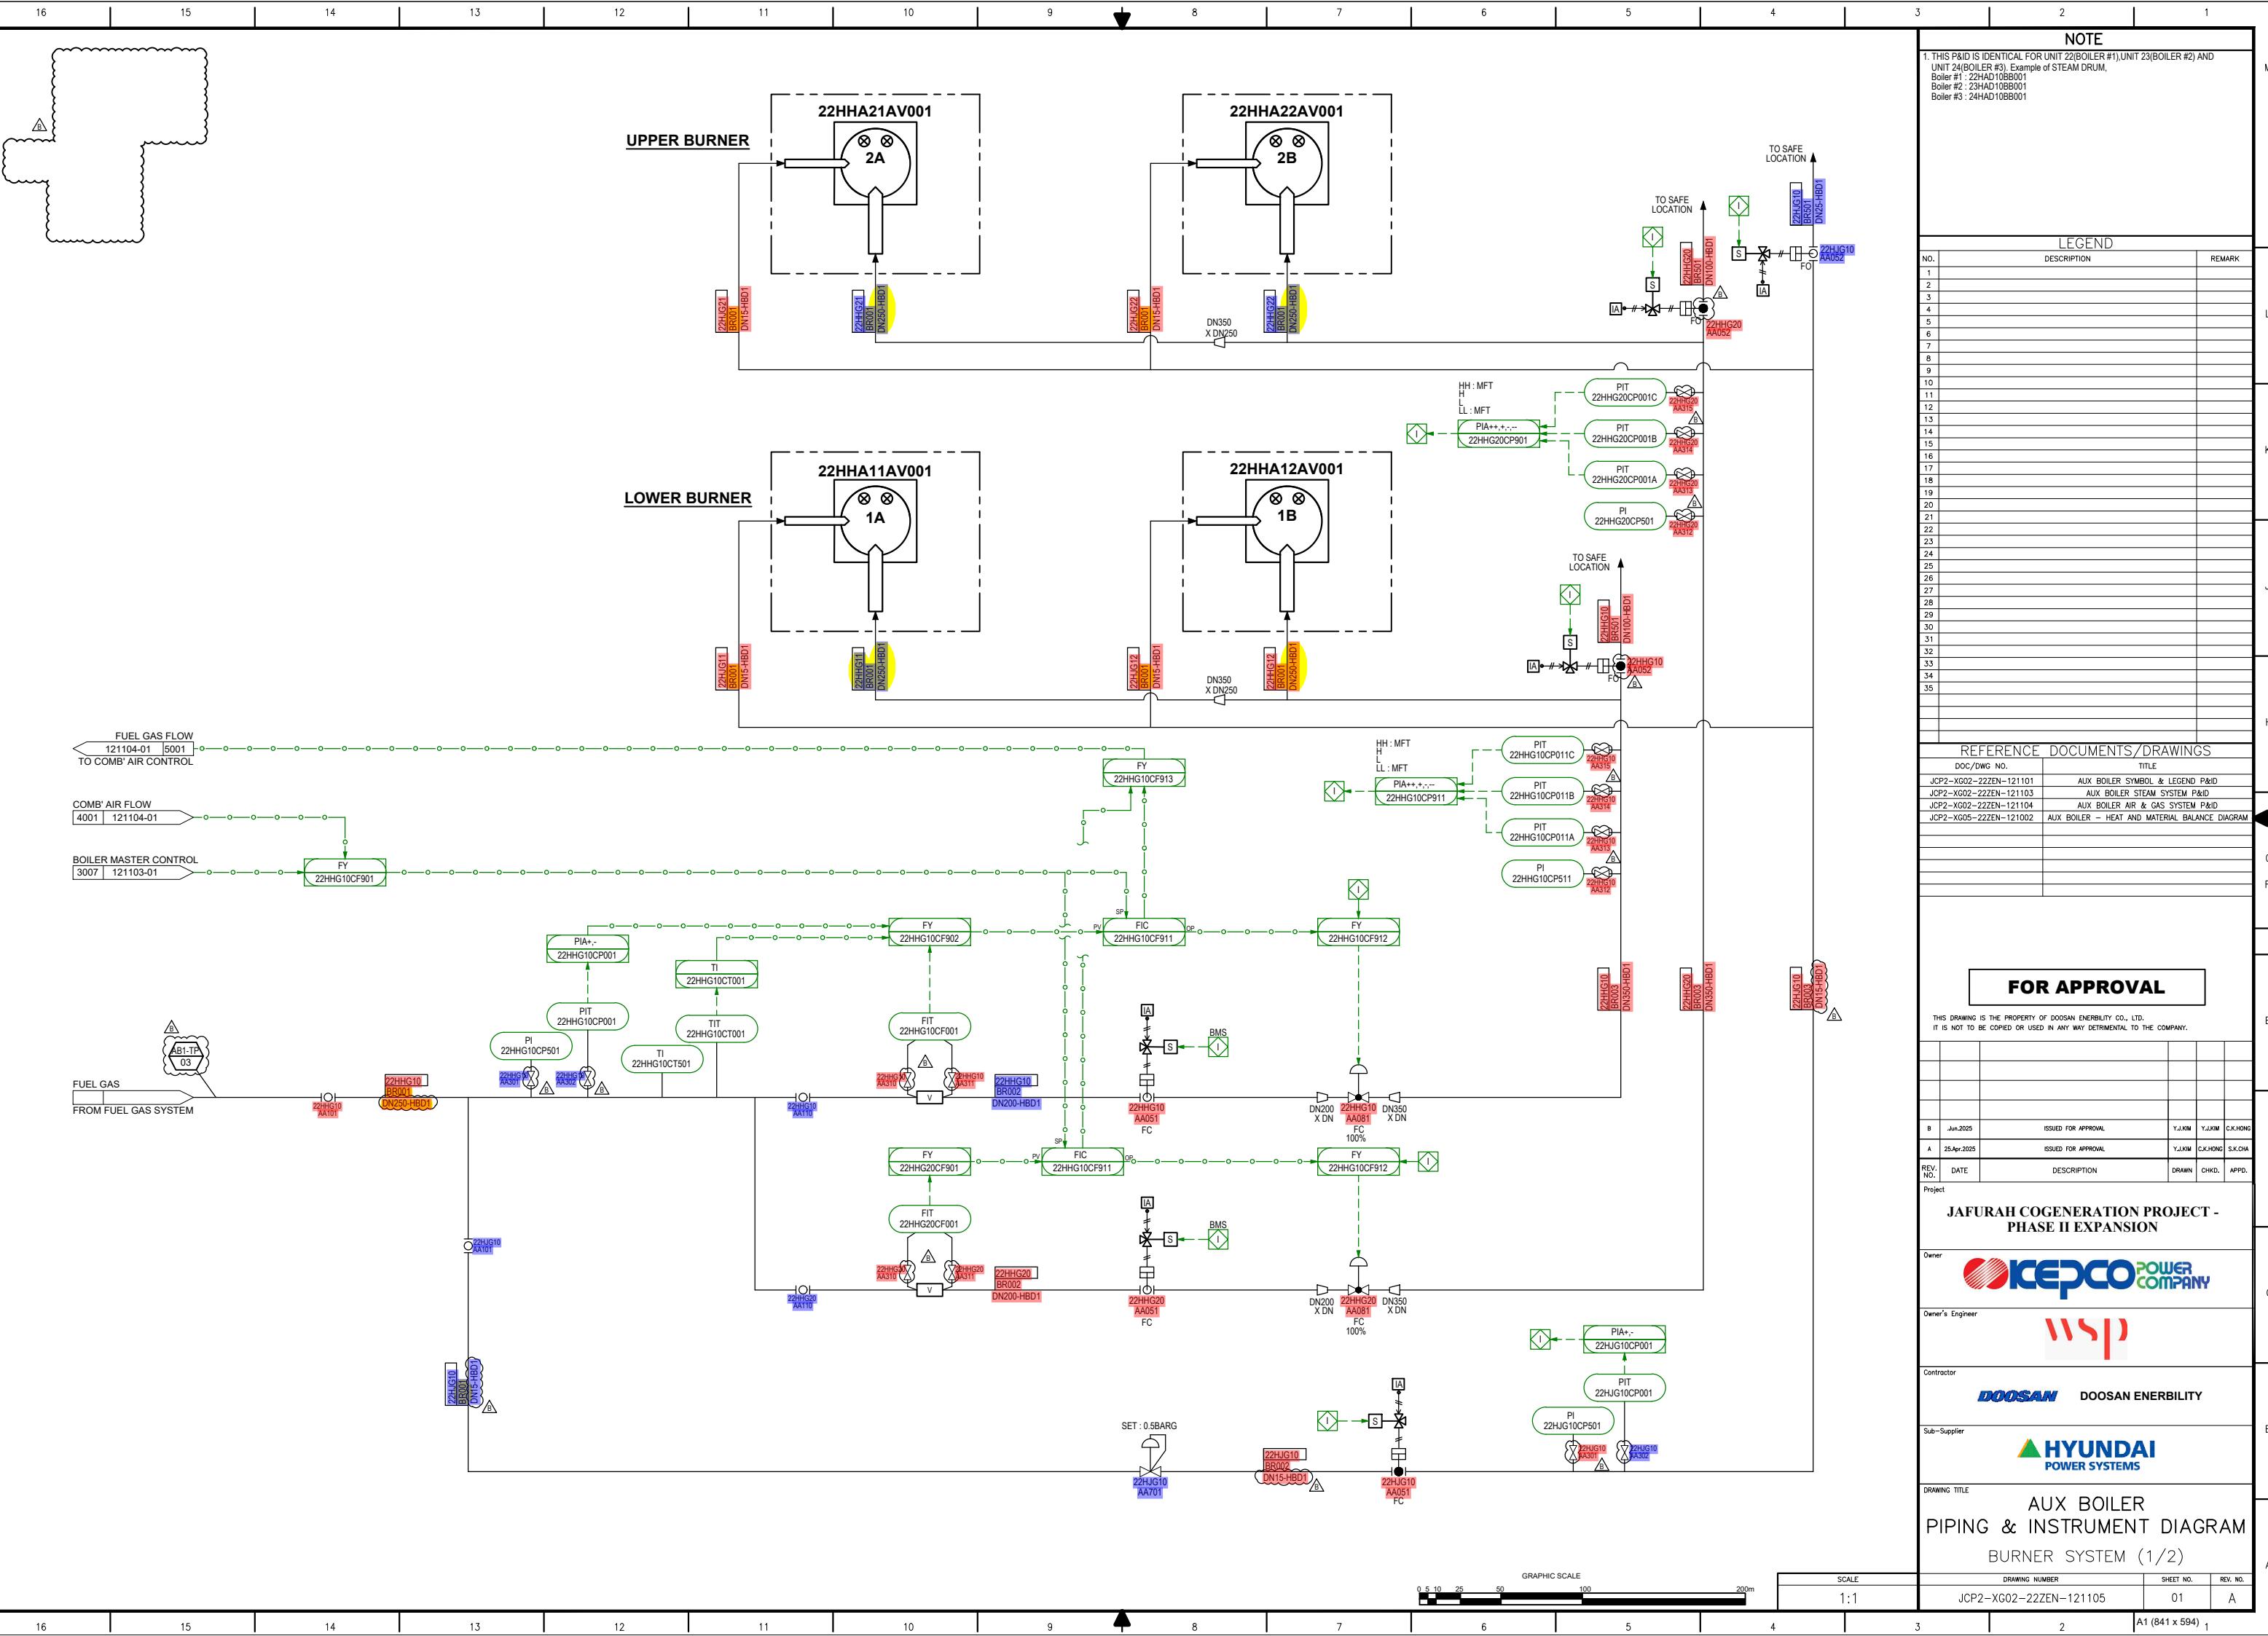

1. THIS P&ID IS IDENTICAL FOR UNIT 22(BOILER #1),UNIT 23(BOILER #2) AND
UNIT 24(BOILER #3). Example of STEAM DRUM,
Boiler #1 : 24HAD10BB001
Boiler #2 : 24HAD10BB001
Boiler #3 : 24HAD10BB001

LEGEND

NO.	DESCRIPTION	REMARK
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		

REFERENCE DOCUMENTS/DRAWINGS

DOC/DWG NO.	TITLE
JCP2-XG02-22ZEN-121101	AUX BOILER SYMBOL & LEGEND P&ID
JCP2-XG05-22ZEN-121002	AUX BOILER - HEAT AND MATERIAL BALANCE DIAGRAM

FOR APPROVAL

THIS DRAWING IS THE PROPERTY OF DOOSAN ENERBILITY CO., LTD.
IT IS NOT TO BE COPIED OR USED IN ANY WAY DEDIMENTAL TO THE COMPANY.

B	Jun.2025	ISSUED FOR APPROVAL	Y.J.KIM	Y.J.KIM	C.K.HONG
A	25-Apr-2025	ISSUED FOR APPROVAL	Y.J.KIM	C.K.HONG	S.K.CHIA
REV. NO.	DATE	DESCRIPTION	DRAWN	CHKD.	APPD.
Project					

JAFURAH COGENERATION PROJECT - PHASE II EXPANSION

Owner 

Owner's Engineer 

Contractor

DOOSAN DOOSAN ENERBILITY

Sub-Supplier 


DRAWING TITLE


AUX BOILER


PIPING & INSTRUMENT DIAGRAM


BURNER SYSTEM (2/2)

SCALE	DRAWING NUMBER	HEET NO.	REV. NO.
1:1	JCP2-XG02-22ZEN-121105	02	A

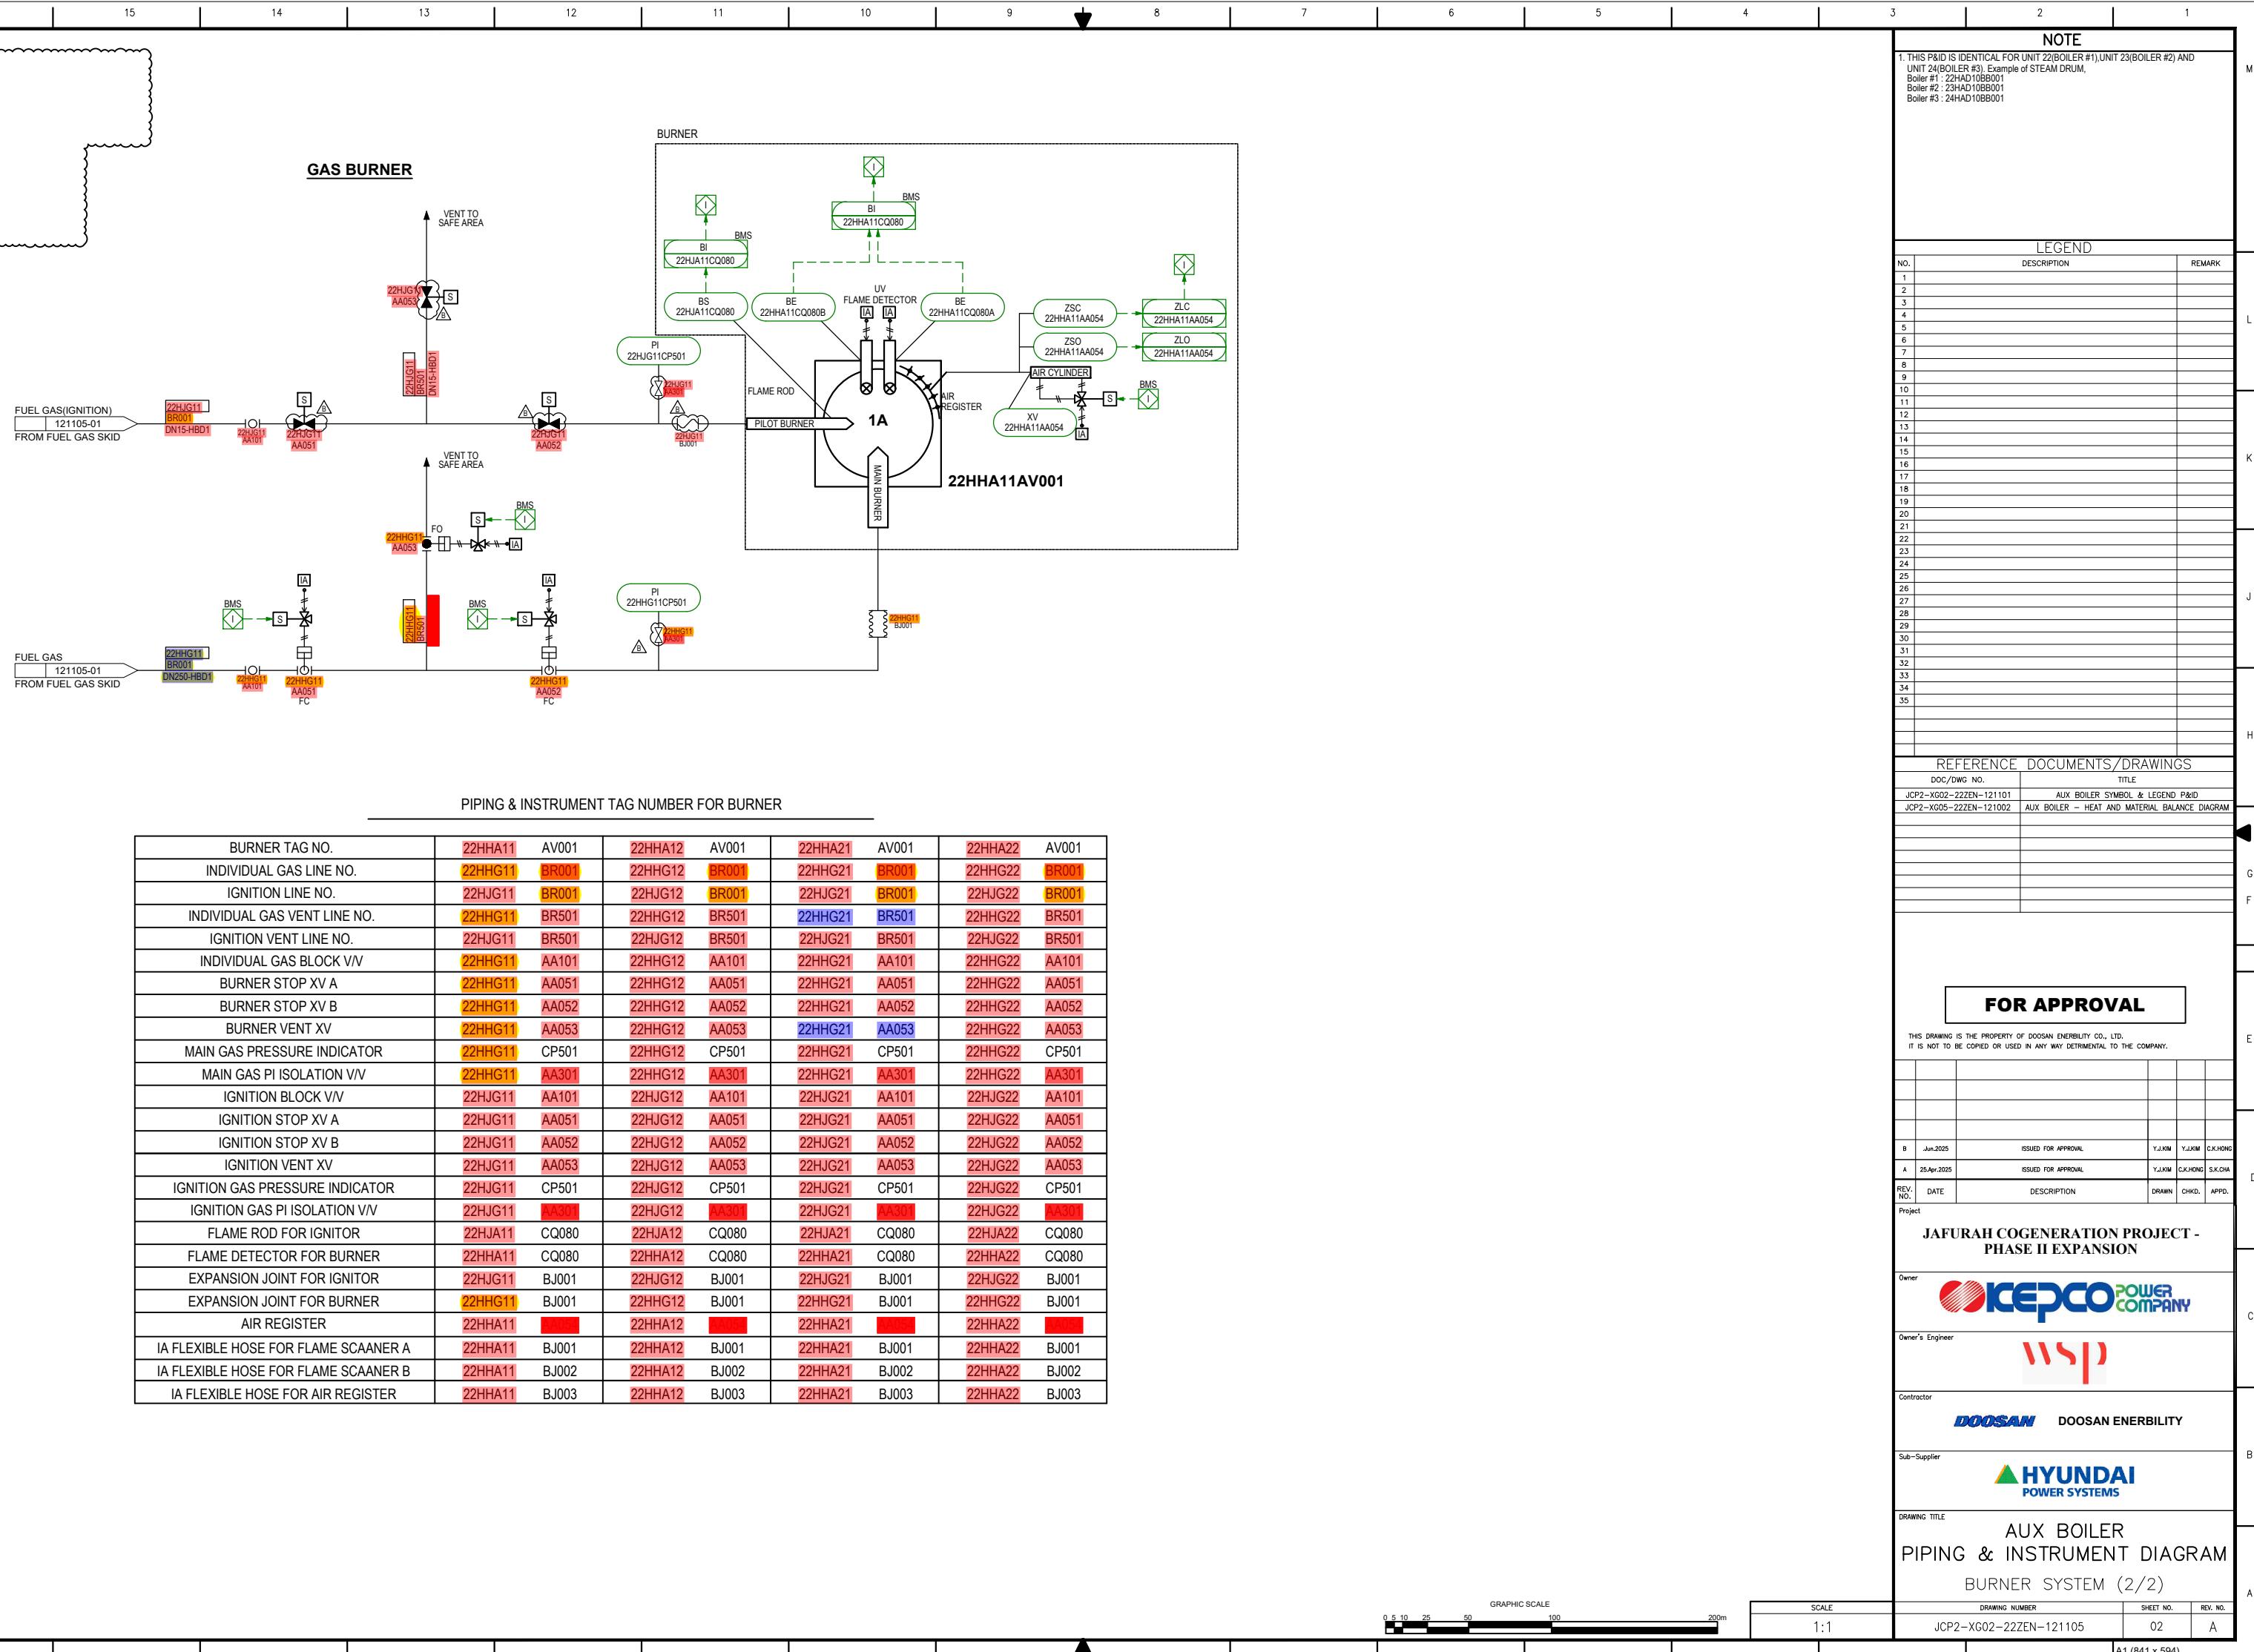

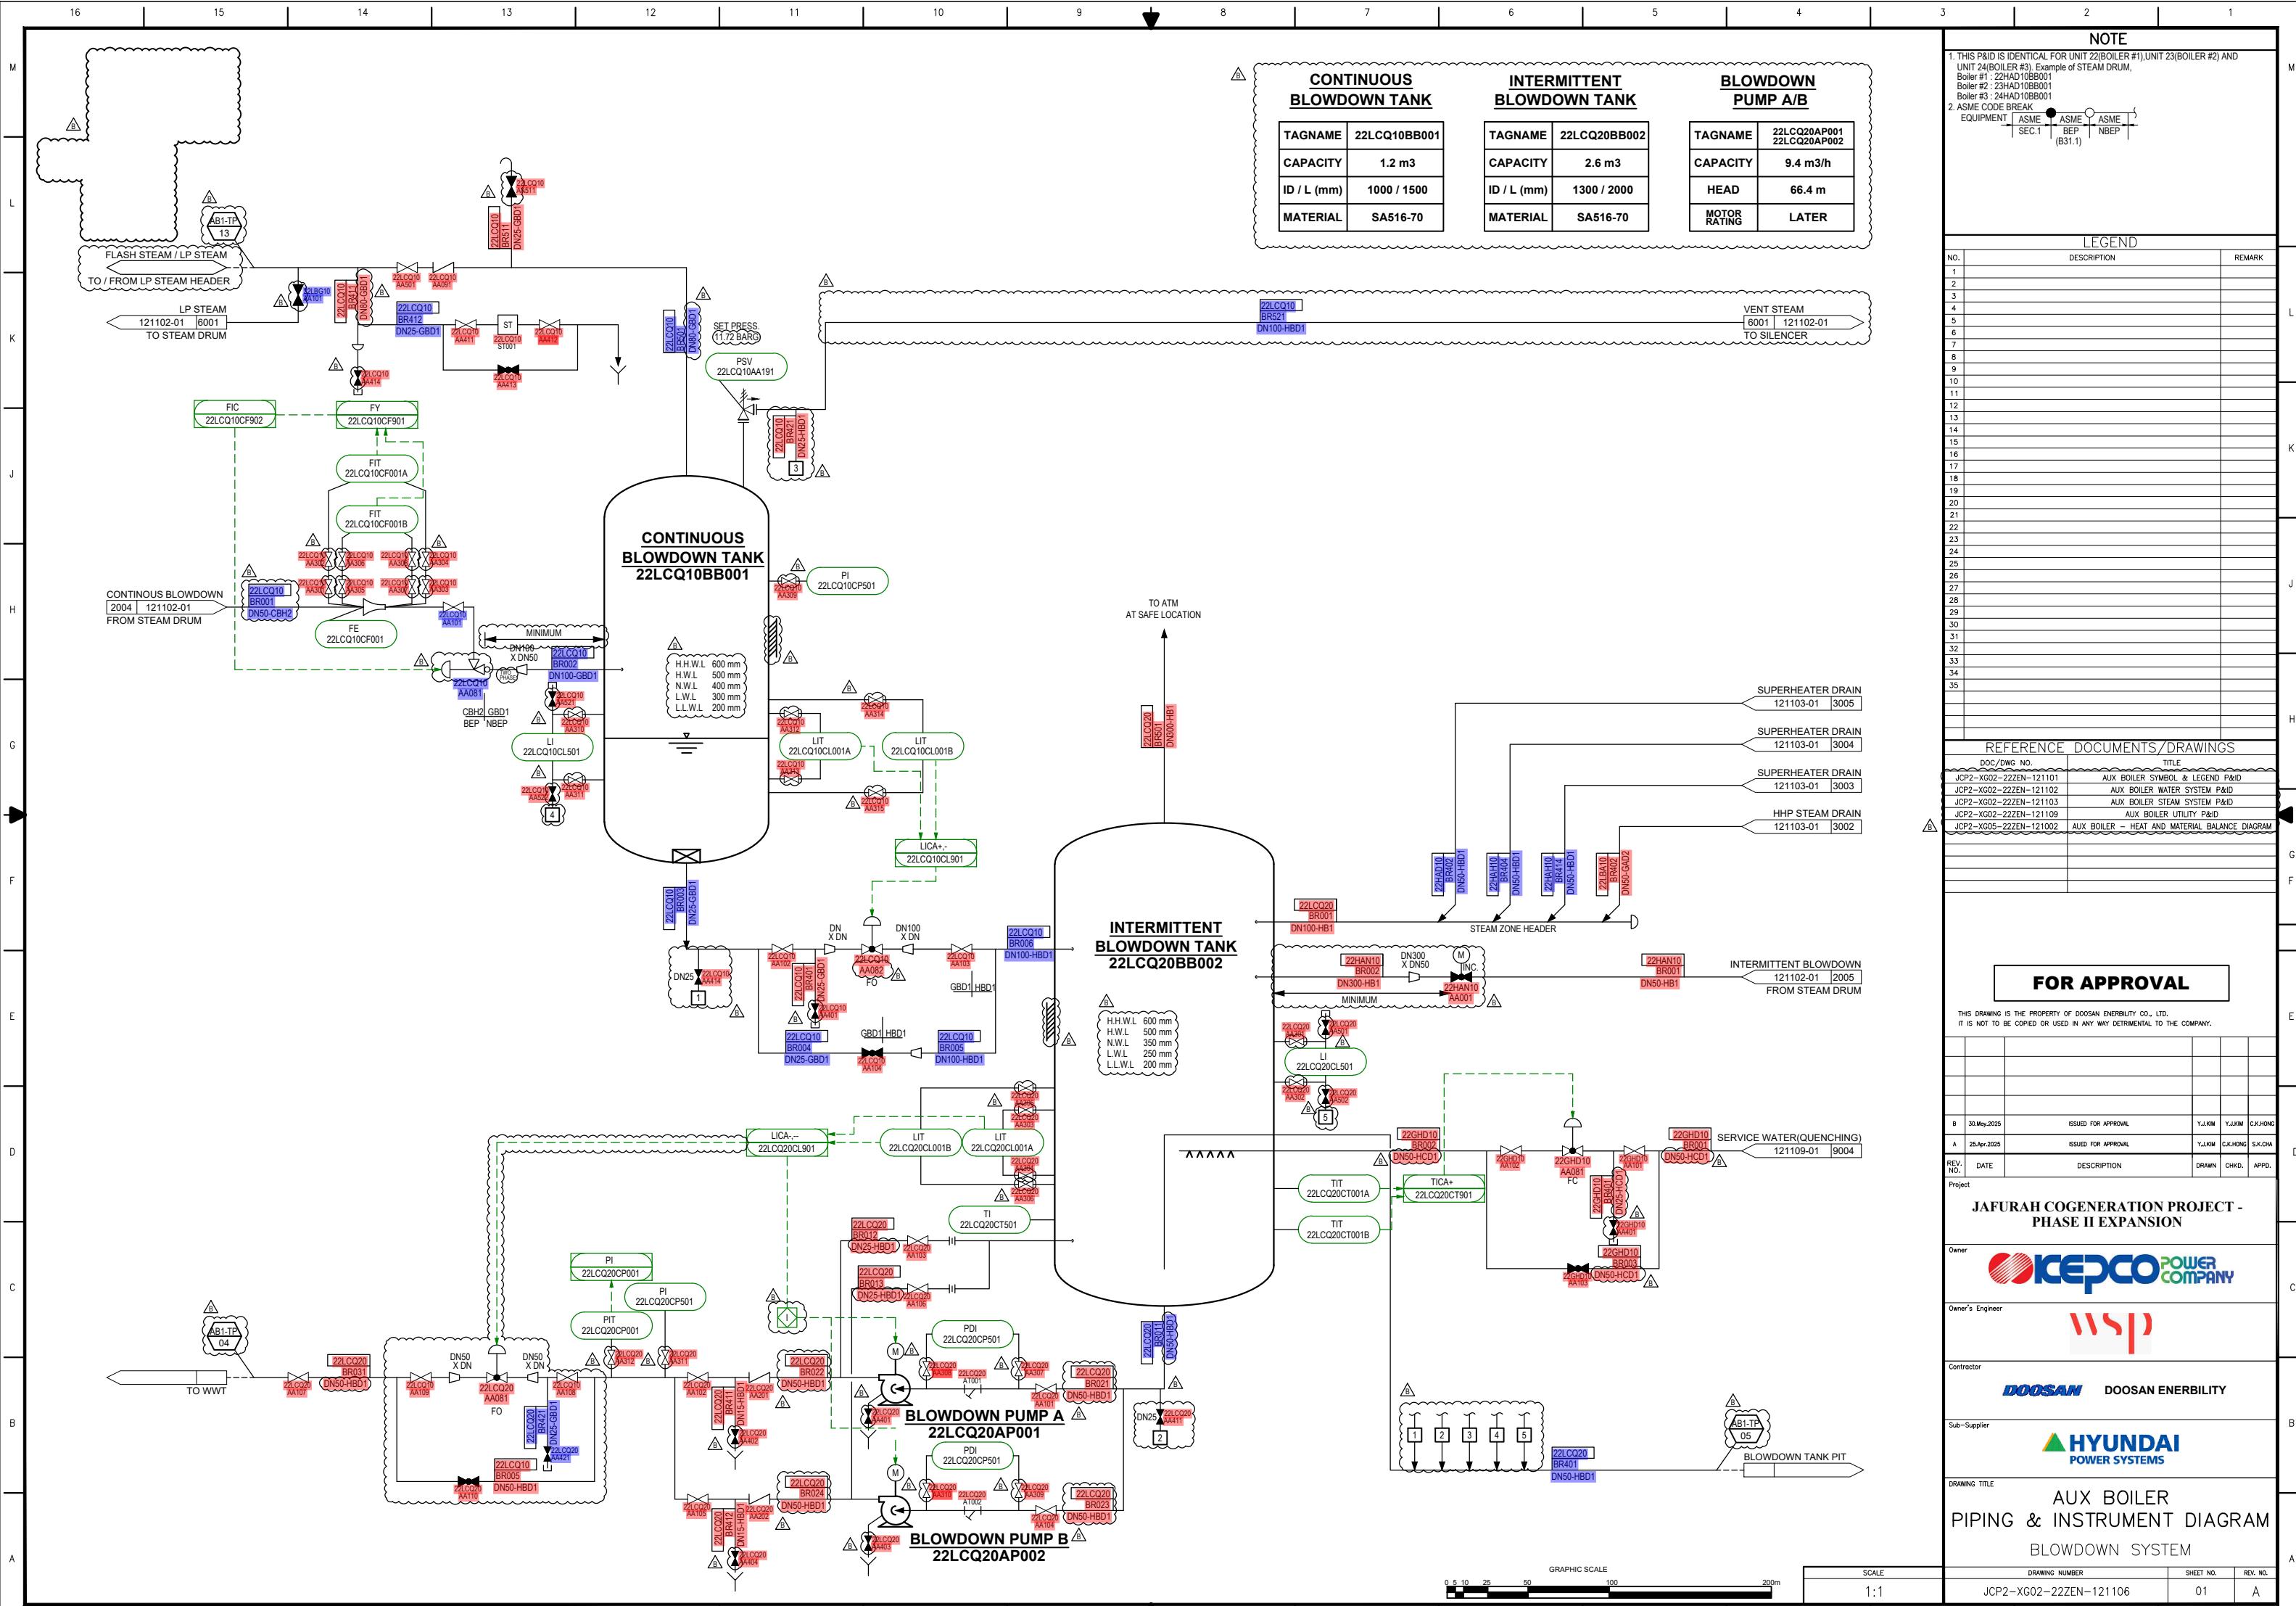

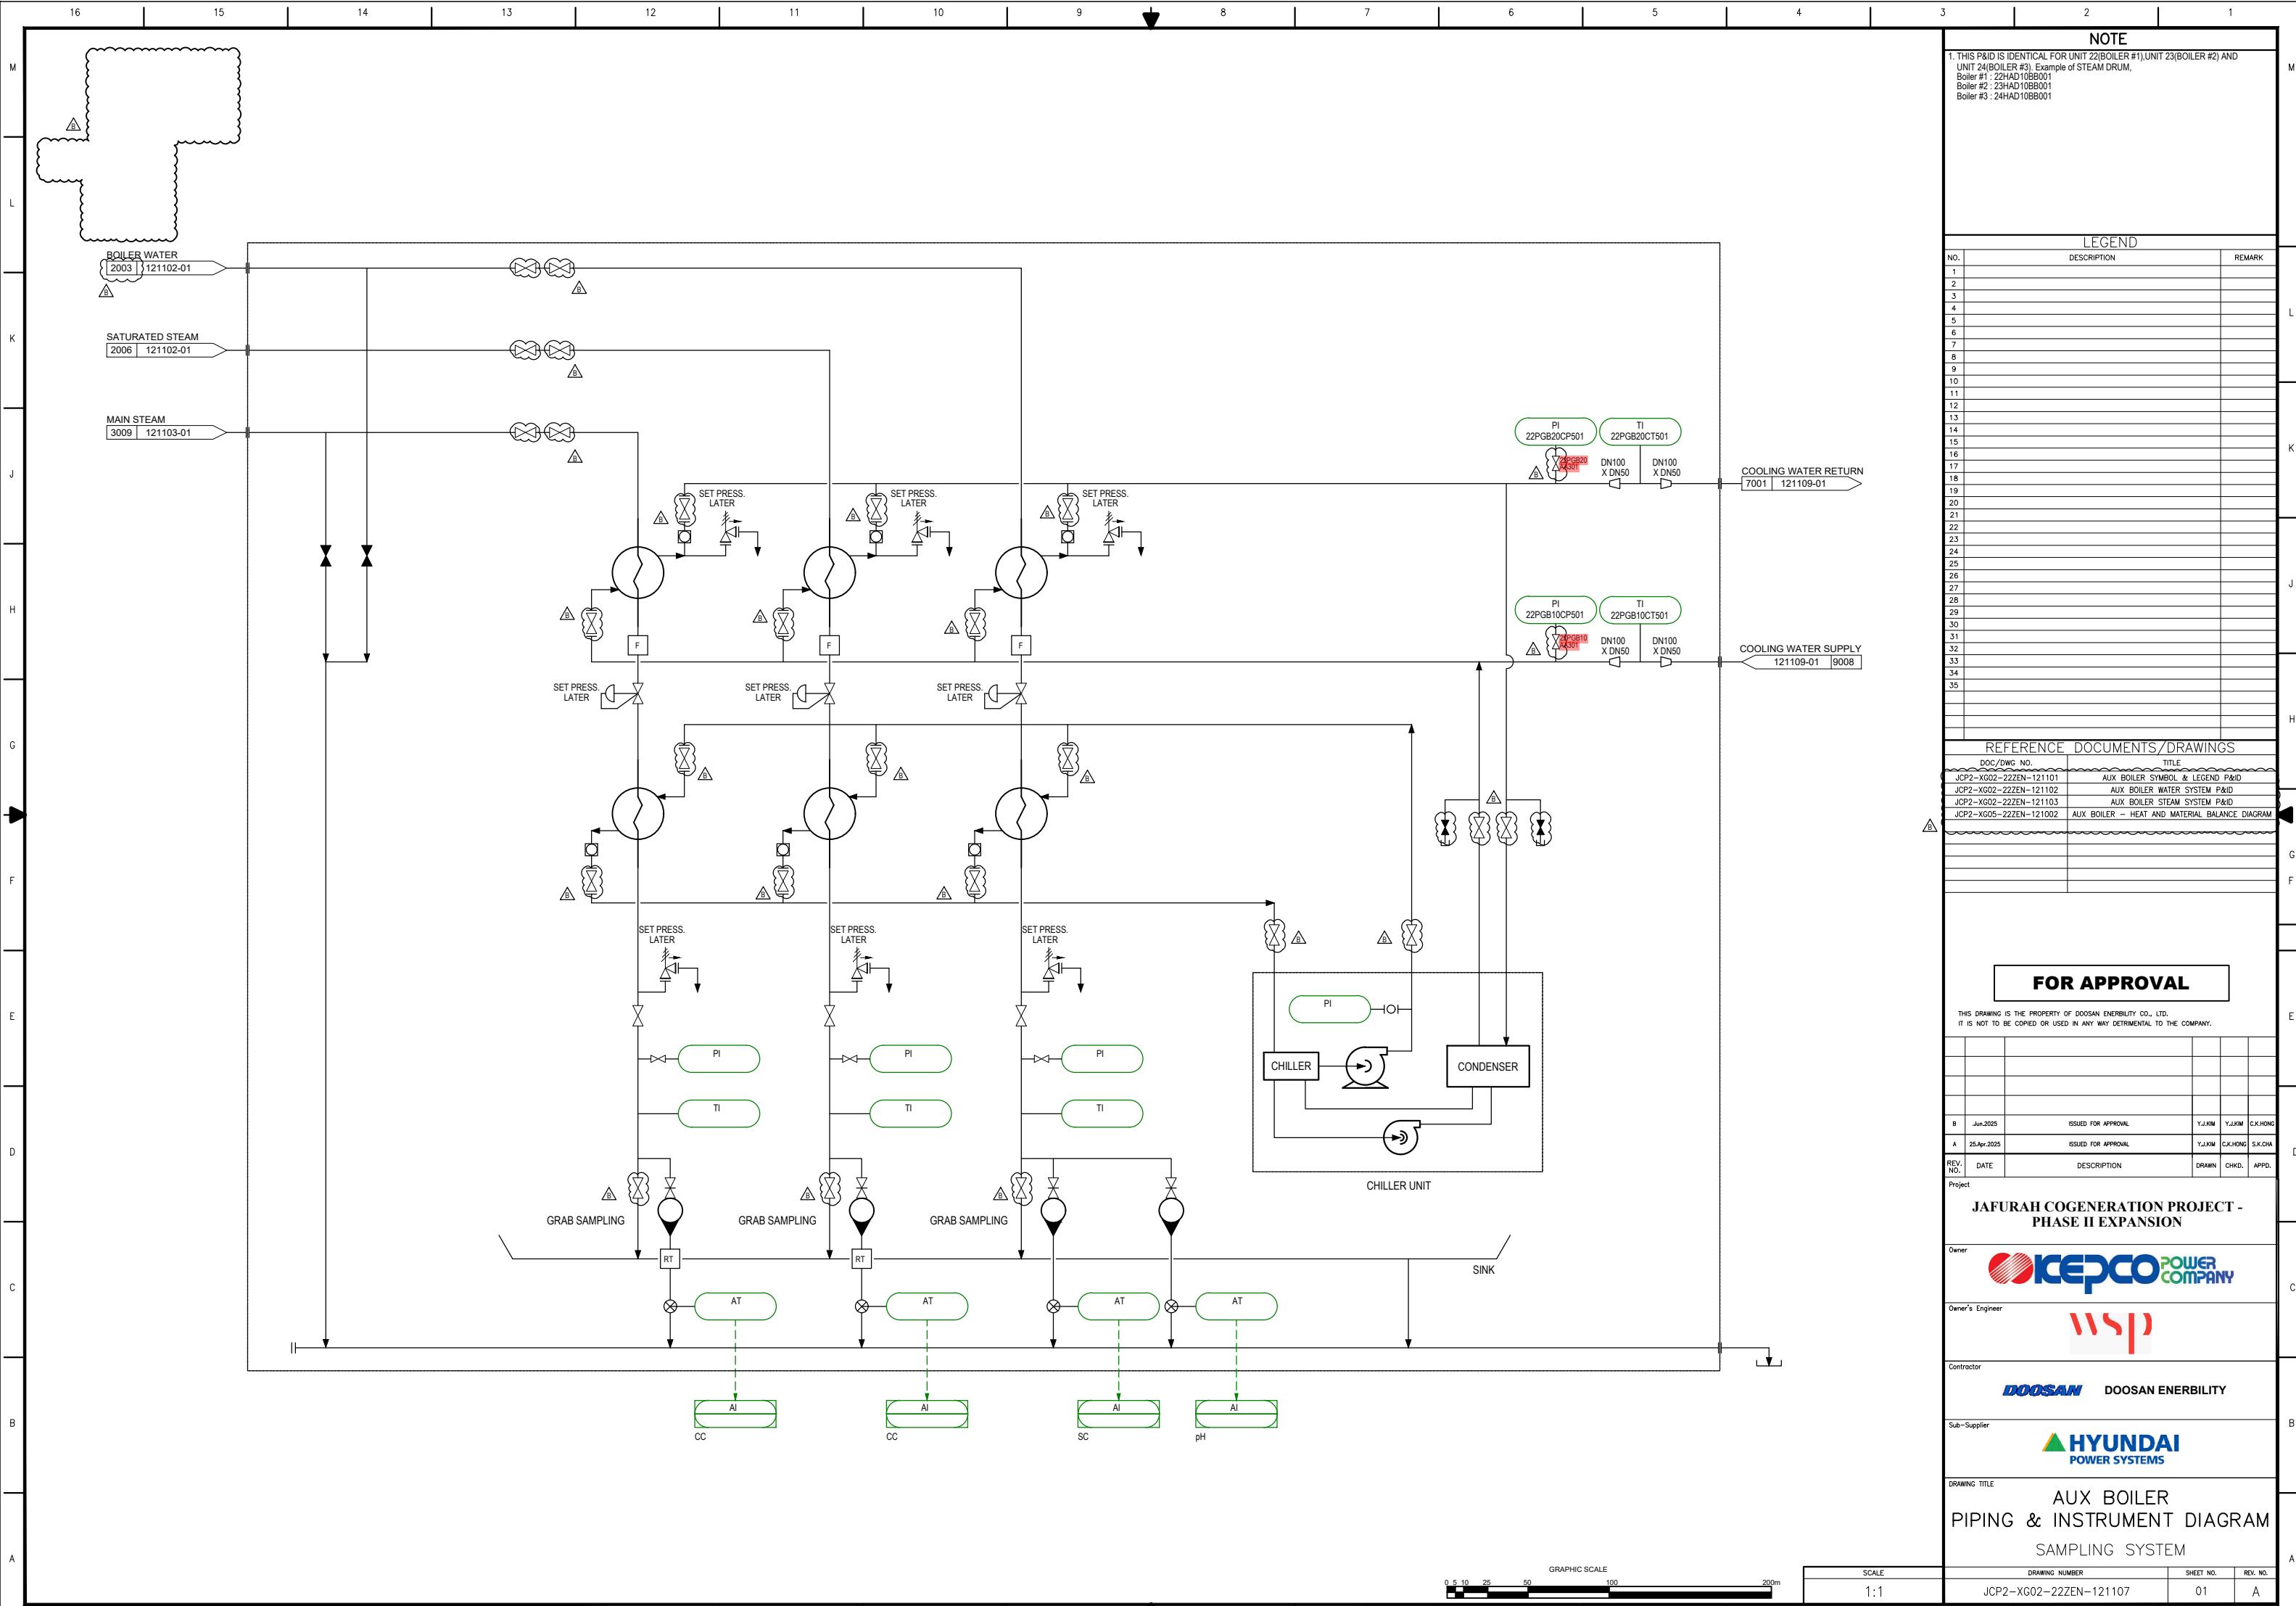

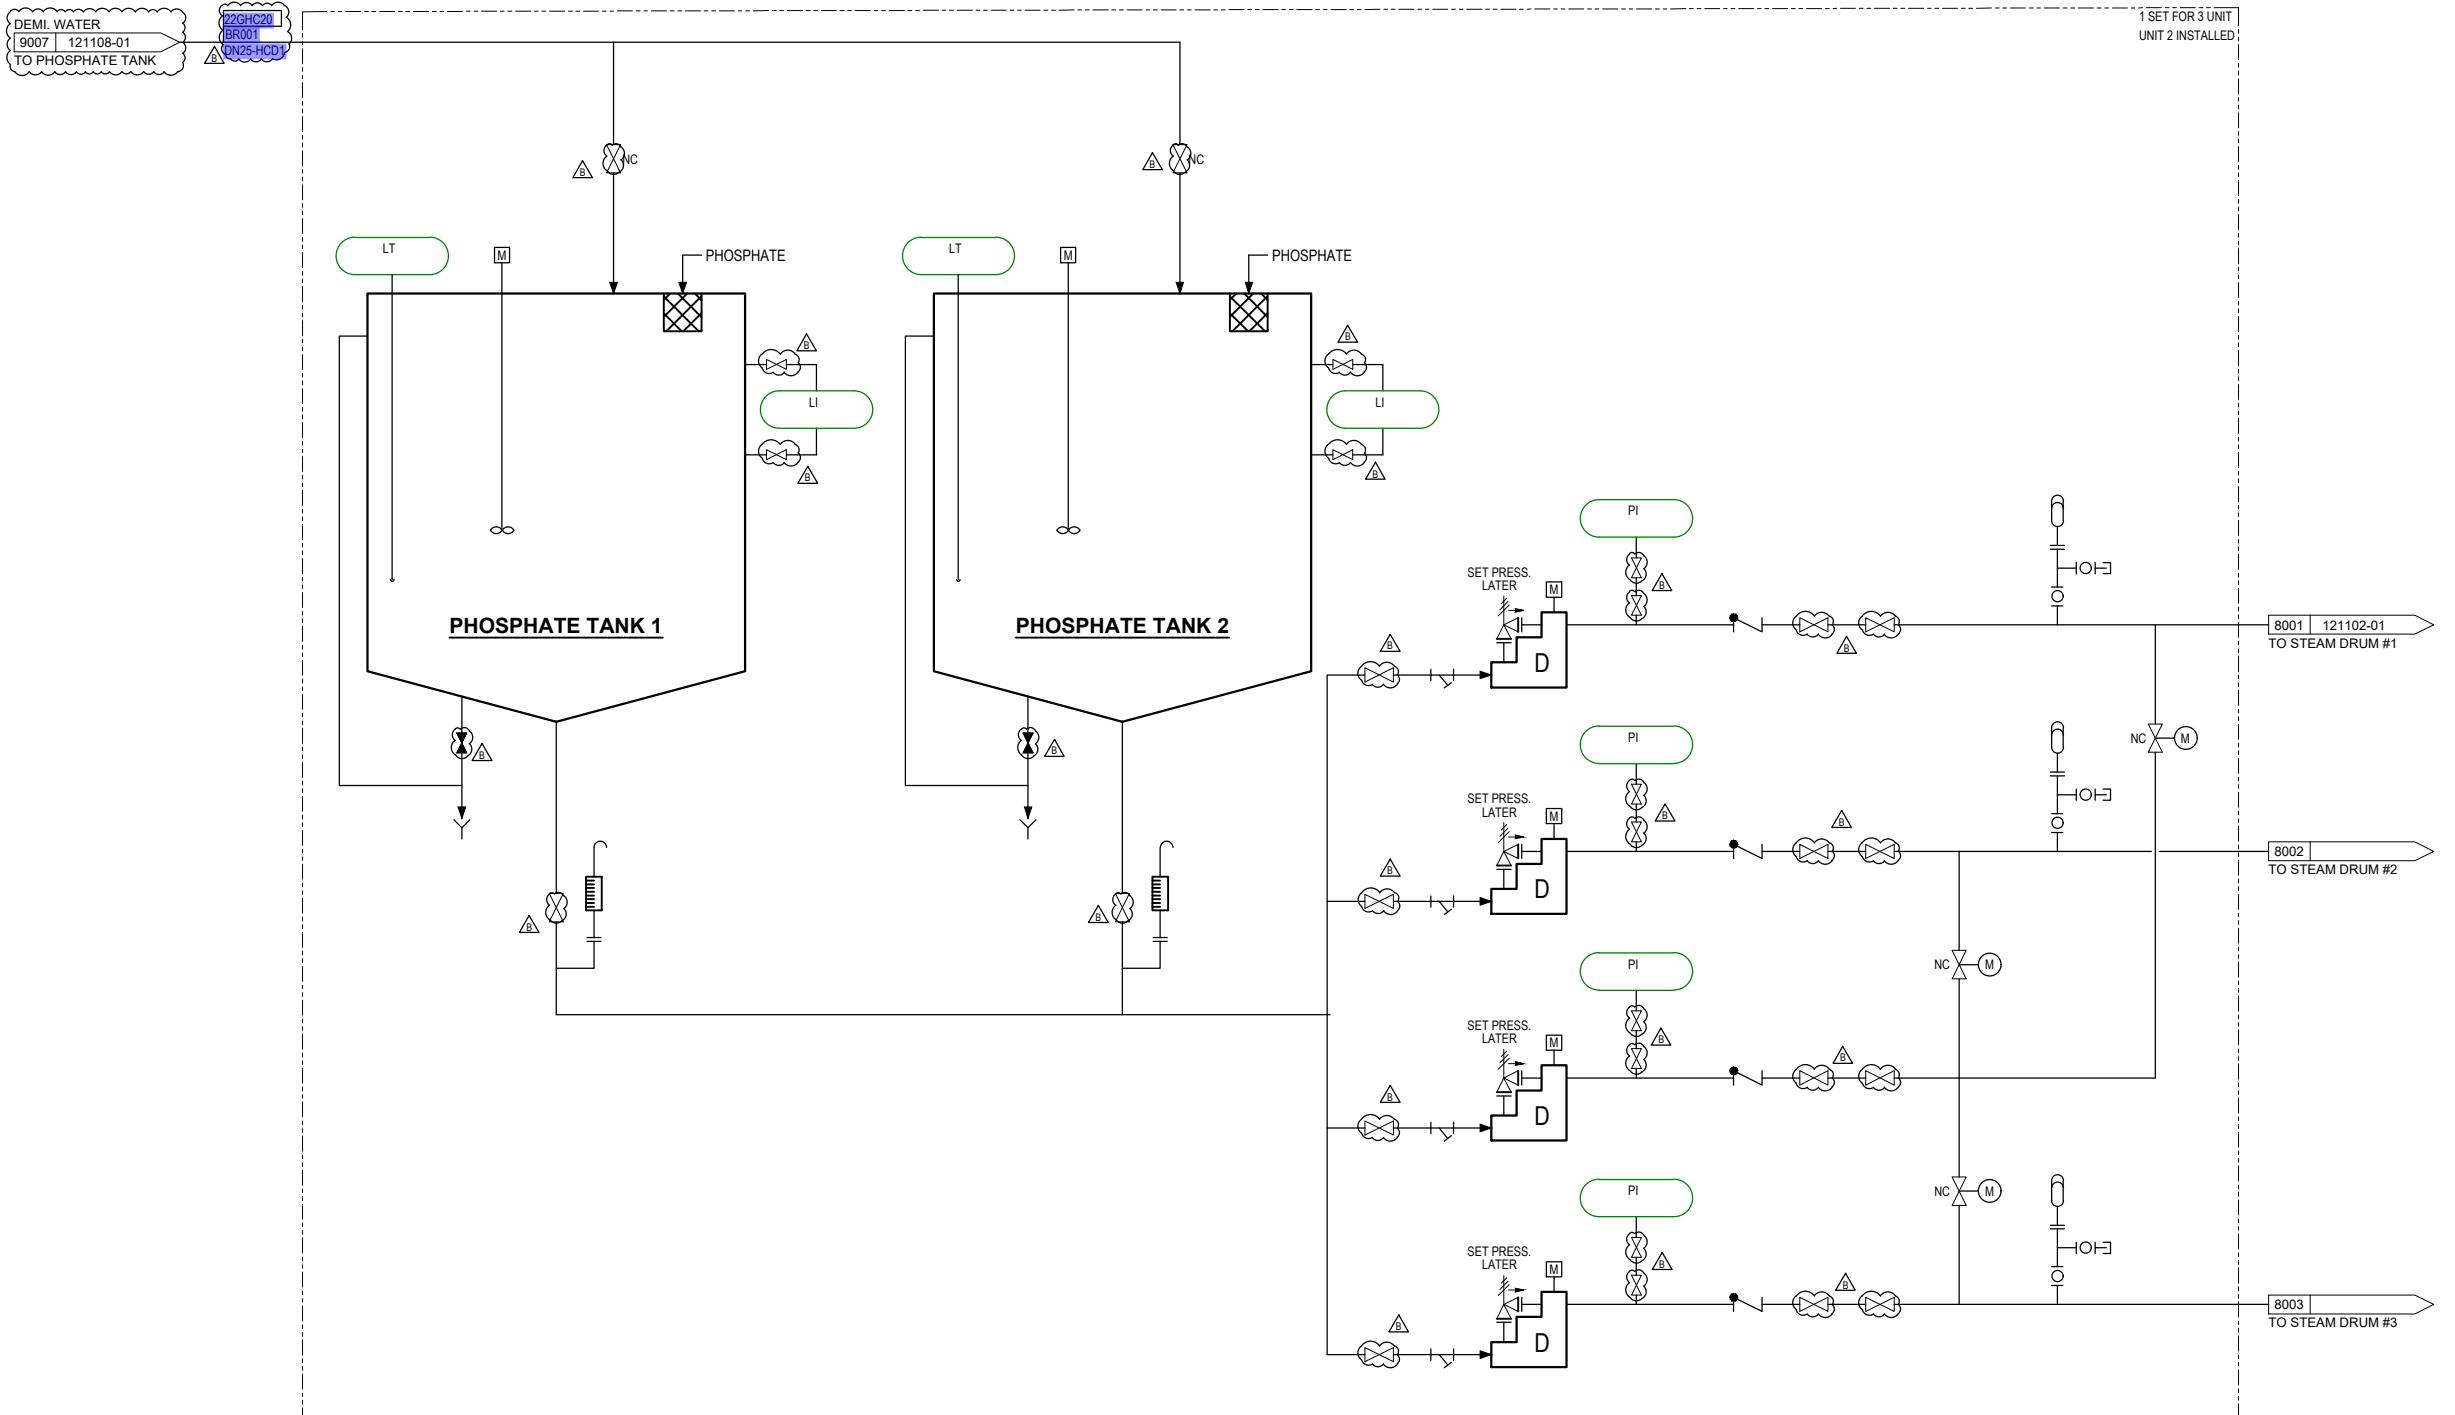

NOTE

LEGEND	
DESCRIPTION	REMARK
	L
	K
	J

REFERENCE DOCUMENTS/DRAWINGS

REFERENCE	DOCUMENTS/DRAWINGS	TITLE
DOC/DWG NO.		
2-XG02-22ZEN-121101	AUX BOILER SYMBOL & LEGEND P&ID	
2-XG02-22ZEN-121102	AUX BOILER WATER SYSTEM P&ID	
2-XG02-22ZEN-121109	AUX BOILER UTILITY P&ID	
2-XG05-22ZEN-121002	AUX BOILER - HEAT AND MATERIAL BALANCE DIAGRAM	
		G
		F

FOR APPROVAL

S DRAWING IS THE PROPERTY OF DOOSAN ENERBILITY CO., LTD.
S NOT TO BE COPIED OR USED IN ANY WAY DETERMINAL TO THE COMPANY

DATE	DESCRIPTION	DRAWN	CHKD.	APPD.
Jun.2025	ISSUED FOR APPROVAL	Y.J.KIM	Y.J.KIM	C.K.HONG
25.Apr.2025	ISSUED FOR APPROVAL	Y.J.KIM	C.K.HONG	S.K.CHA

RAH COGENERATION PROJECT - PHASE II EXPANSION

© 2013 Pearson Education, Inc.

CEPCO POWER COMPANY


s Engineer

WSP

[View All Products](#) | [View All Manufacturers](#)

 HYUNDAI
POWER SYSTEMS

NG TITLE
**AUX BOILER
PING & INSTRUMENT DIAGRAM
CHEMICAL DOING SYSTEM**



GRAPHIC SCALE		SCALE	DRAWING NUMBER	SHEET NO.	REV. NO.
0 5 10 25 50	100 200m	1:1	JCP2-XG02-22ZEN-121108	01	A

NOTE

1. THIS P&ID IS IDENTICAL FOR UNIT 22(BOILER #1), UNIT 23(BOILER #2) AND
UNIT 24(BOILER #3). Example of STEAM DRUM,
Boiler #1 : 24HAD10BB001
Boiler #2 : 24HAD10BB001
Boiler #3 : 24HAD10BB001

LEGEND

NO.	DESCRIPTION	REMARK
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		

REFERENCE DOCUMENTS/DRAWINGS

DOC/DWG NO.	TITLE
JCP2-XG02-22ZEN-121101	AUX BOILER SYMBOL & LEGEND P&ID
JCP2-XG02-22ZEN-121102	AUX BOILER WATER SYSTEM P&ID
JCP2-XG02-22ZEN-121104	AUX BOILER AIR & GAS P&ID
JCP2-XG02-22ZEN-121106	AUX BOILER BLOWDOWN SYSTEM P&ID
JCP2-XG02-22ZEN-121107	AUX BOILER SAMPLING SYSTEM P&ID
JCP2-XG02-22ZEN-121108	AUX BOILER CHEMICAL DOSING SYSTEM P&ID
JCP2-XG05-22ZEN-121002	AUX BOILER - HEAT AND MATERIAL BALANCE DIAGRAM

FOR APPROVAL

THIS DRAWING IS THE PROPERTY OF DOOSAN ENERBILITY CO., LTD.
IT IS NOT TO BE COPIED OR USED IN ANY WAY DEDIMENTAL TO THE COMPANY.

B	30-May-2025	ISSUED FOR APPROVAL	Y.J.KIM	Y.J.KIM	C.K.HONG
A	25-Apr-2025	ISSUED FOR APPROVAL	Y.J.KIM	C.K.HONG	S.K.CHIA
REV. NO.	DATE	DESCRIPTION	DRAWN	CHKD.	APPD.

Project JAFURAH COGENERATION PROJECT - PHASE II EXPANSION




Owner's Engineer WSP

Contractor DOOSAN DOOSAN ENERBILITY

Sub-Supplier HYUNDAI POWER SYSTEMS


DRAWING TITLE AUX BOILER
PIPING & INSTRUMENT DIAGRAM
UTILITY

DRAWING NUMBER JCP2-XG02-22ZEN-121109
SHEET NO. 01
REV. NO. A

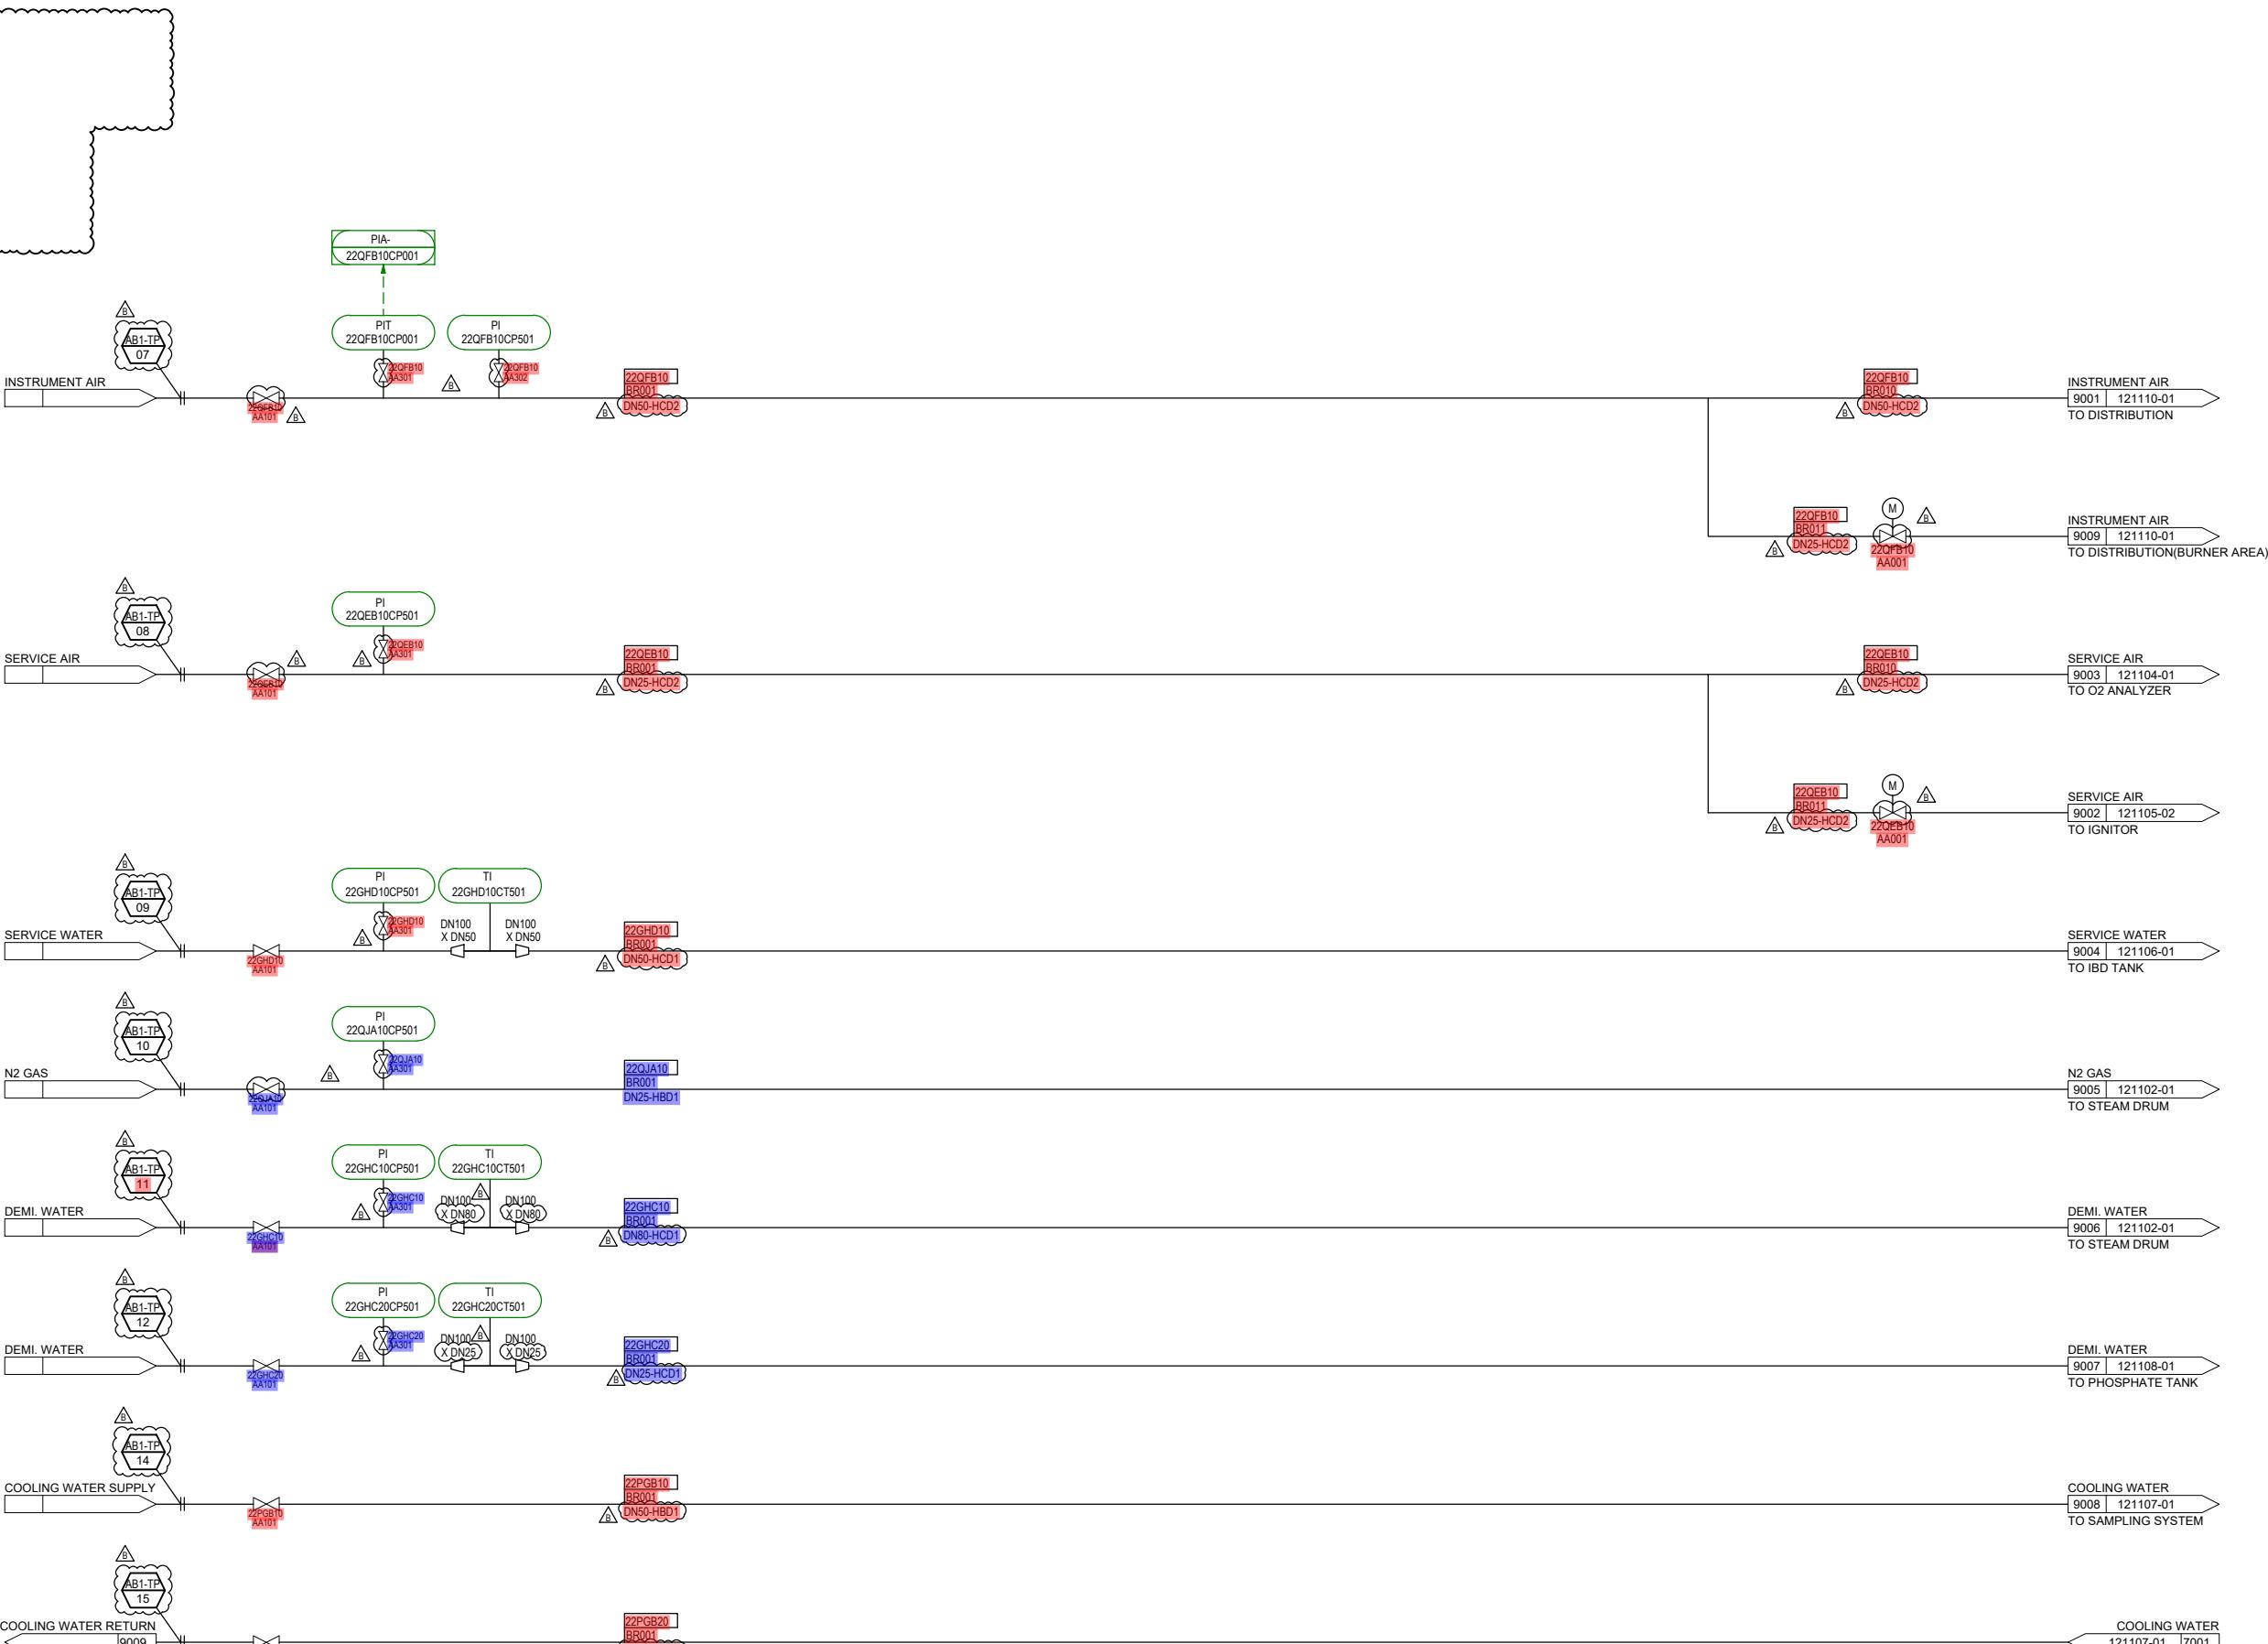

GRAPHIC SCALE 0 5 10 25 50 100 200m

SCALE 1:1

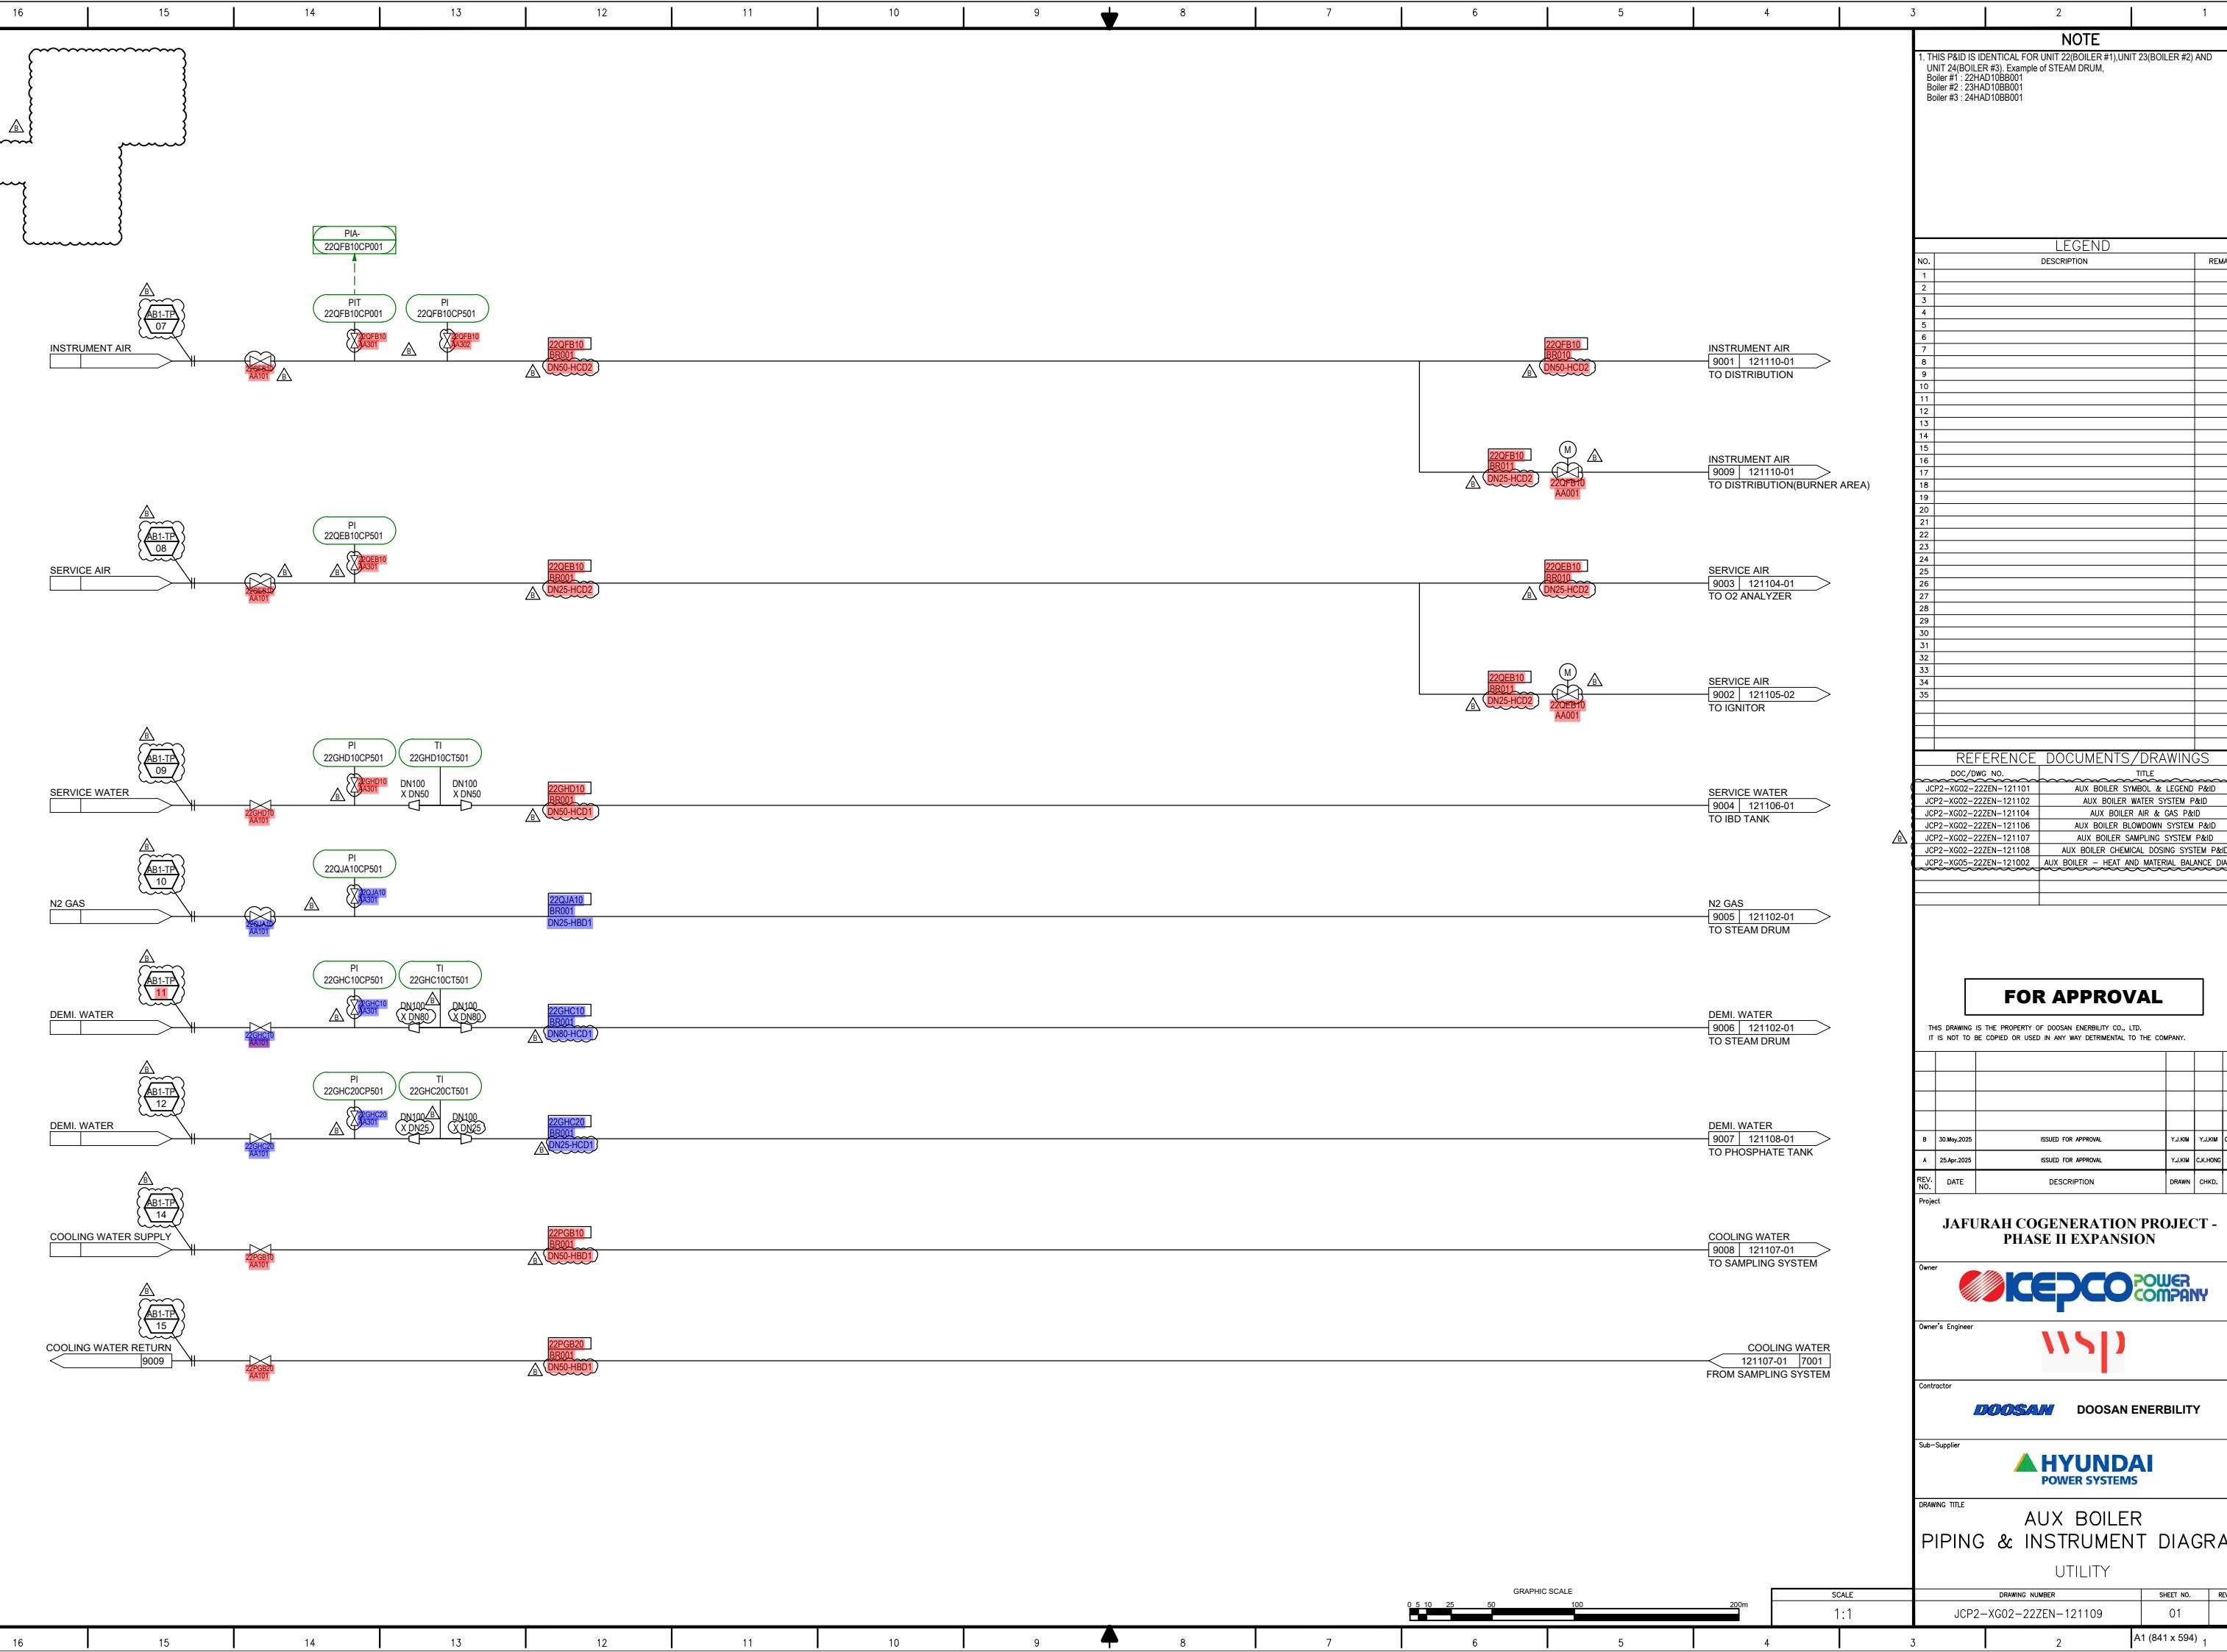

NOTE

1. THIS P&ID IS IDENTICAL FOR UNIT 22(BOILER #1), UNIT 23(BOILER #2) AND
UNIT 24(BOILER #3). Example of STEAM DRUM,
Boiler #1 : 24HAD10BB001
Boiler #2 : 24HAD10BB001
Boiler #3 : 24HAD10BB001

LEGEND

NO.	DESCRIPTION	REMARK
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		

REFERENCE DOCUMENTS/DRAWINGS

DOC/DWG NO.	TITLE
JCP2-XG02-22ZEN-121101	AUX BOILER SYMBOL & LEGEND P&ID
JCP2-XG02-22ZEN-121102	AUX BOILER WATER SYSTEM P&ID
JCP2-XG02-22ZEN-121103	AUX BOILER STEAM SYSTEM P&ID
JCP2-XG02-22ZEN-121104	AUX BOILER AIR & GAS SYSTEM P&ID
JCP2-XG02-22ZEN-121105	AUX BOILER BURNER SYSTEM P&ID
JCP2-XG02-22ZEN-121106	AUX BOILER BLOWDOWN SYSTEM P&ID
JCP2-XG05-22ZEN-121002	AUX BOILER - HEAT AND MATERIAL BALANCE DIAGRAM

FOR APPROVAL

THIS DRAWING IS THE PROPERTY OF DOOSAN ENERBILITY CO., LTD.
IT IS NOT TO BE COPIED OR USED IN ANY WAY DEDIMENTAL TO THE COMPANY.

B	30-May-2025	ISSUED FOR APPROVAL	Y.J.KW	Y.J.KW	C.K.HONG
A	25-Apr-2025	ISSUED FOR APPROVAL	Y.J.KW	C.K.HONG	S.K.CHA
REV. NO.	DATE	DESCRIPTION	DRAWN	CHKD.	APPD.

Project

JAFURAH COGENERATION PROJECT - PHASE II EXPANSION

Owner's Engineer

Contractor

DOOSAN DOOSAN ENERBILITY

Sub-Supplier

DRAWING TITLE
AUX BOILER
PIPING & INSTRUMENT DIAGRAM
INSTRUMENT AIR

SCALE	DRAWING NUMBER	HEET NO.	REV. NO.
1:1	JCP2-XG02-22ZEN-121110	01	A

